



SALIOT
Lighting Innovation


WE CREATE NEW VALUE
innovate lighting world



Smart Adjustable Light for the IoT

Light controlled easily and smoothly.

Operate the lighting direction vertically and horizontally, dimming, light distribution angle, and color temperature easily from the smartphone application, Lighting operations are simplified with a wide range of available applications.

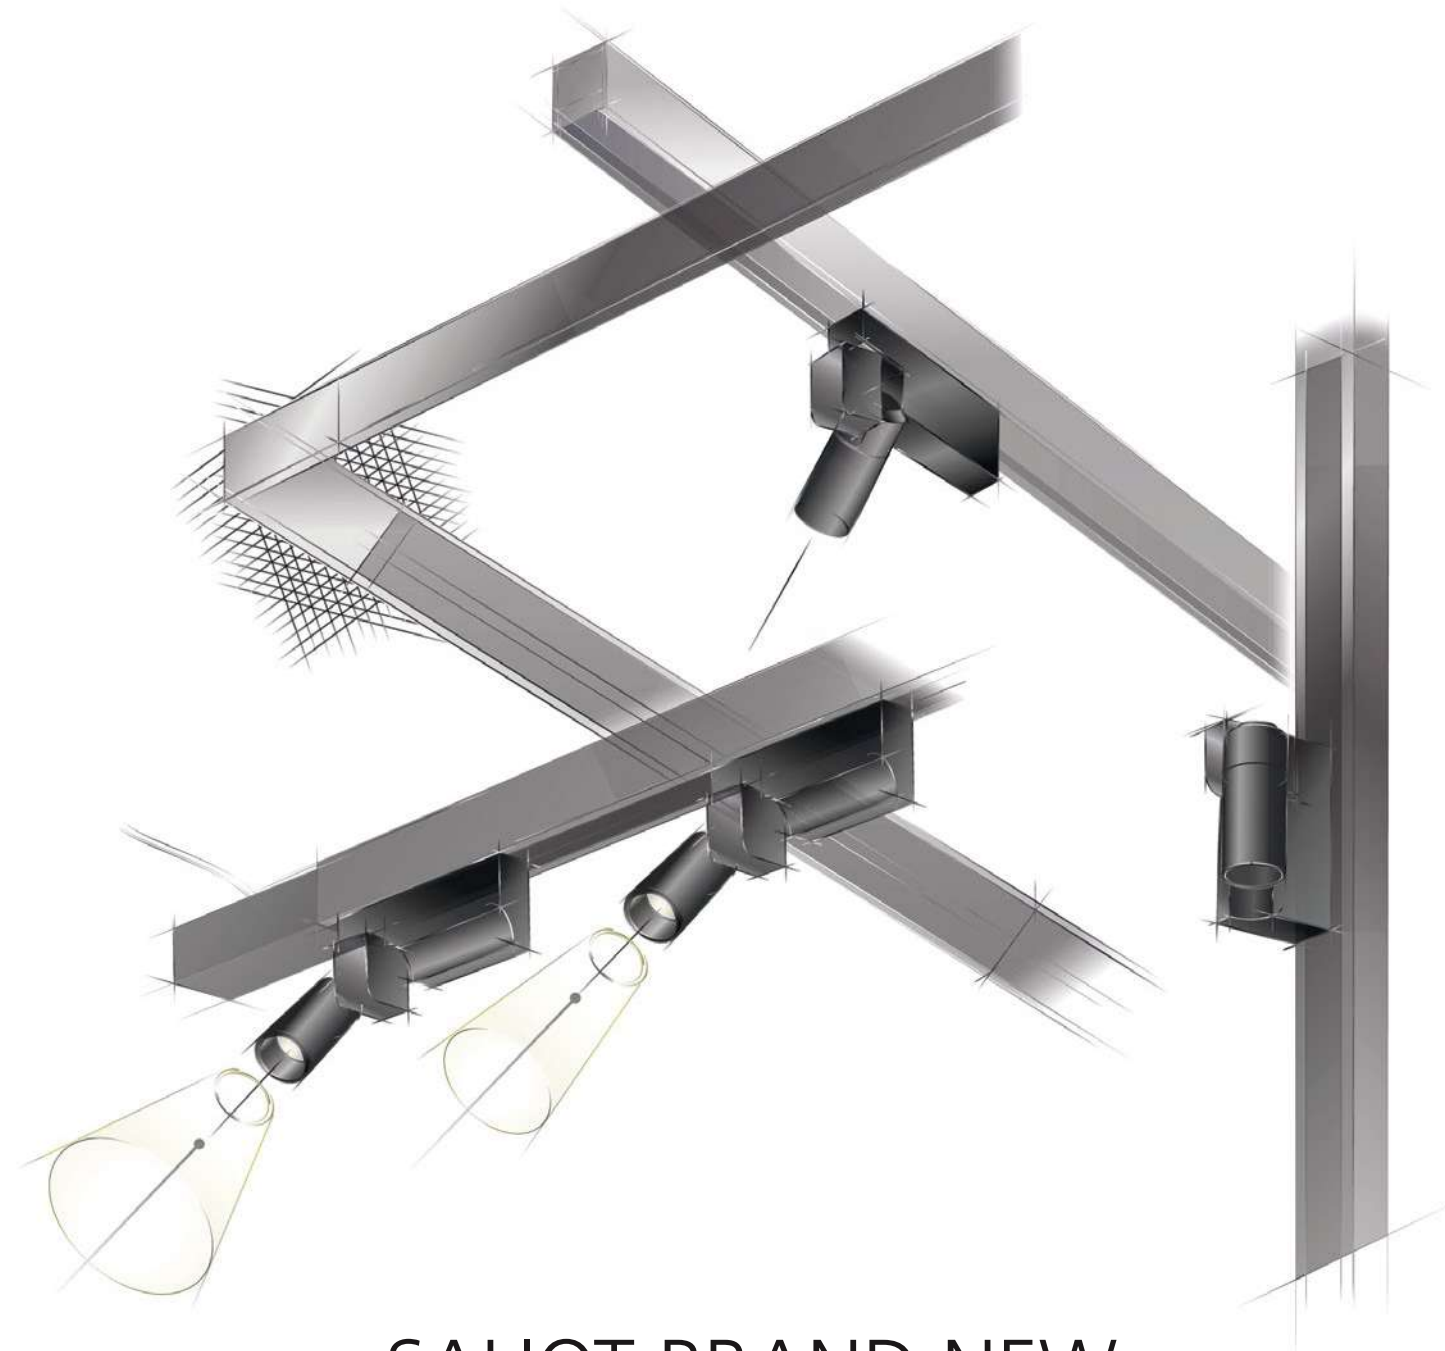



SALIOT BRAND NEW MS-P2 series

small optical solution with rail




Control

- Changes in the vertical and horizontal direction, dimming, light distribution control, and color temperature of each lighting fixture are easy
- Easy operation with tablets and smartphones * Need to download the dedicated application.
- Multiple scenes can be set up and stored in the app; up to 100 SALIOT's can be controlled and numerous light spaces can be reproduced with one touch

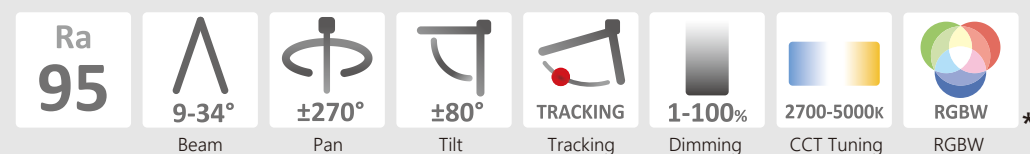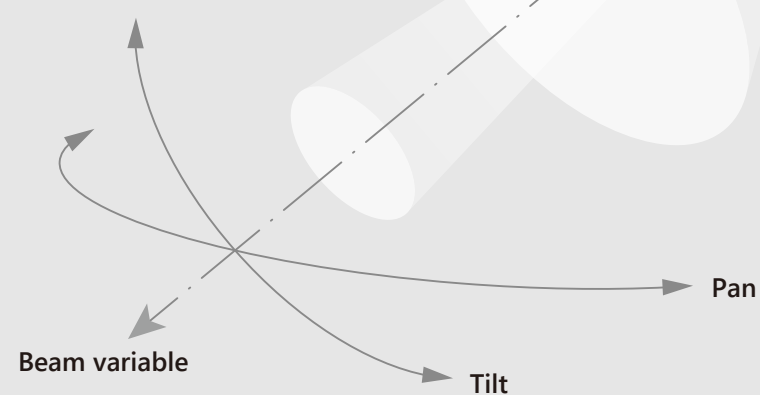


*Function varies depending on model


Adjustment

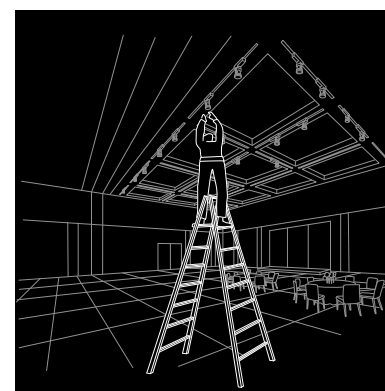

- No need for ladders or lifts to change fixture orientation
- All operations are available on the smartphone screen
- Easy-to-understand interfaces such as individual control, group control, and map functions

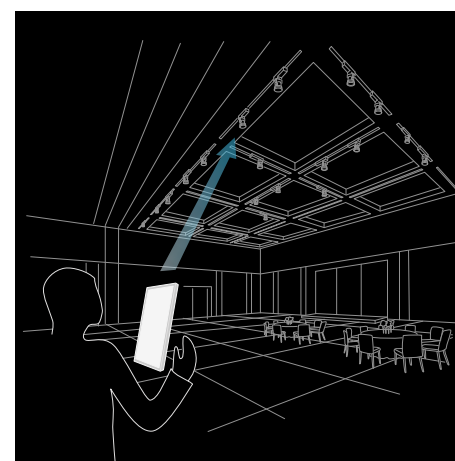

Network

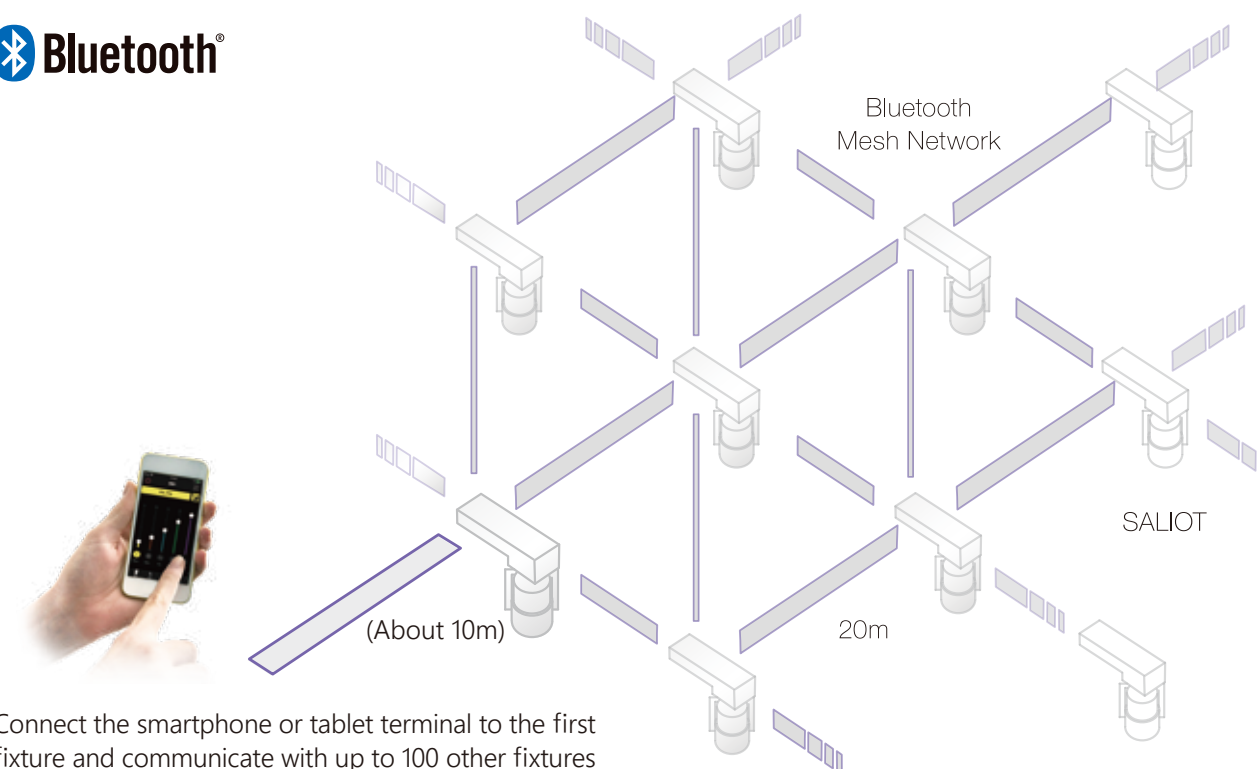

Connect the smartphone or tablet terminal to the first fixture and communicate with up to 100 other fixtures through a Mesh Network.

* The device or operating environment may be affected

Bluetooth® Wordmarks and logos are registered trademarks owned by BluetoothSIG, Inc.


AAS HARLEY-DAVIDSON® OF BANGKOK
AAS HARLEY-DAVIDSON® OF Siam Paragon
AAS HARLEY-DAVIDSON® OF Pattaya

Address: Thailand



Nagoya Toyopet Dankeidori Showroom

Address: Nagoya, Japan

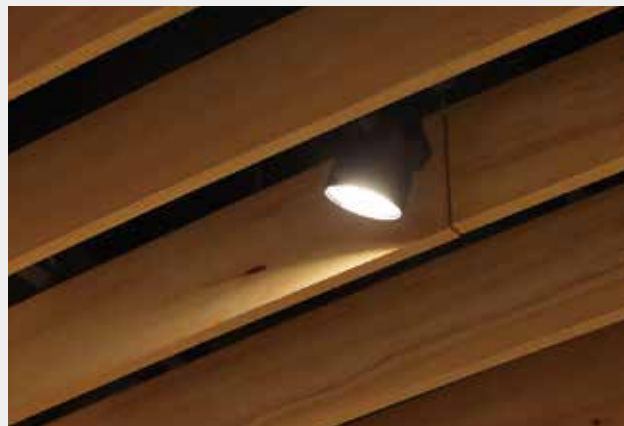

TOYOTA ALIVE Space

Address: Bangkok, Thailand



ISETAN Shinjuku Store

Address: Tokyo, Japan



Main Building 1F, Area for Handbags



Nihombashi Mitsukoshi Main Store

Address: Tokyo, Japan
Isetan Mitsukoshi Holdings Ltd.
ISETAN MITSUKOSHI PROPERTY DESIGN LTD.



Main Building 1F, Stage



SALIOT designed in circular layout on the center.

SHISEIDO THE STORE

Address: Tokyo, Japan



Photo provided by Takumi Ota

GINZA TSUTAYA BOOKS GINZA ATRIUM

Address: Ginza, Tokyo
Culture Convenience Club Co., Ltd.
Design: TONERICO:INC.
Distributed by KOIZUMI LIGHTING TECHNOLOGY CORP.



Photo provided by Nacása&Partners Inc.

WASHIYA SUGIHARA WASHIPAPER, INC.

Address: Fukui, Japan
Design: Soichi Mizutani



PARIS SAINT-GERMAIN CAFÉ

Address: Shibuya, Tokyo



Muko City Cultural Museum

Address: Kyoto, Japan



Photo provided by Panasonic



Mirai Museum of Art

Address: Yokohama, Kanagawa



Kanazawa Utatsuyama Kogei Kobo

Address: Kanazawa, Ishikawa



NIHON BUNKA UNIVERSITY RAKUKOSHA HALL

Address: Hachioji, Tokyo



National Museum of Ethnology

Address: Osaka, Japan



Photo provided by YAMAGIWA



DAIKIN ALES AOYA II

Address: Tottori, Japan
Architect: TAKENAKA Corporation
Interior design: ATELIER MANSARDE



Photo provided by YAMAGIWA

Sofitel Phnom Penh Phokeethra

Address : Phnom Penh, Cambodia




Museo del Novecento

Address: Milano, Italy



Museum

Day

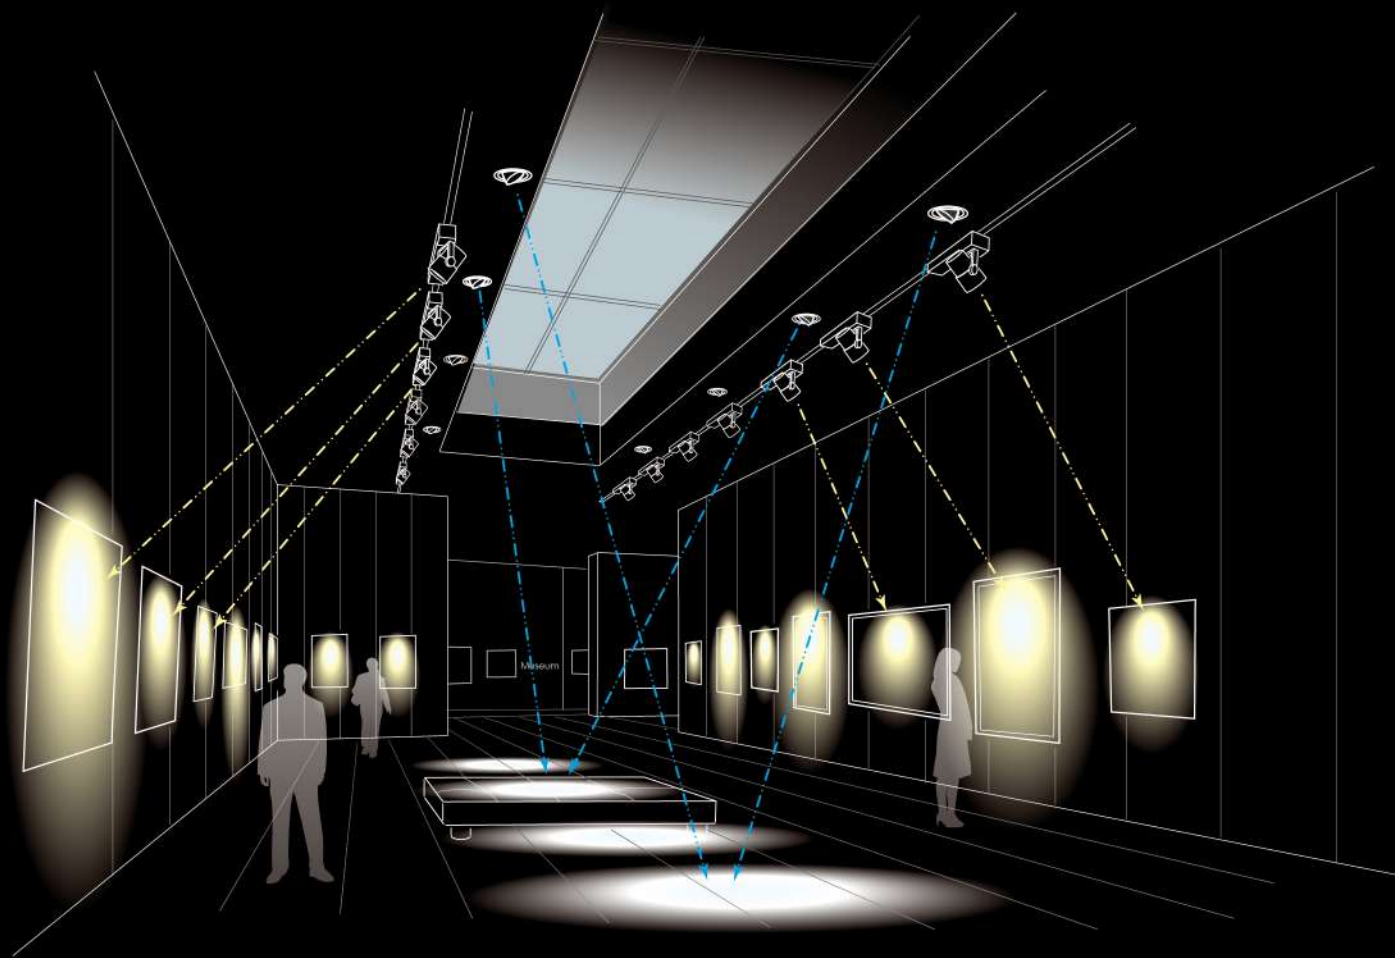


Hotel Banquet Room

Ceremonial Event




Night

Day and night at the museum
Optimum light environment is achieved
without changing the equipment.
Adjustable and flexible lighting to respond
to changes in exhibits.

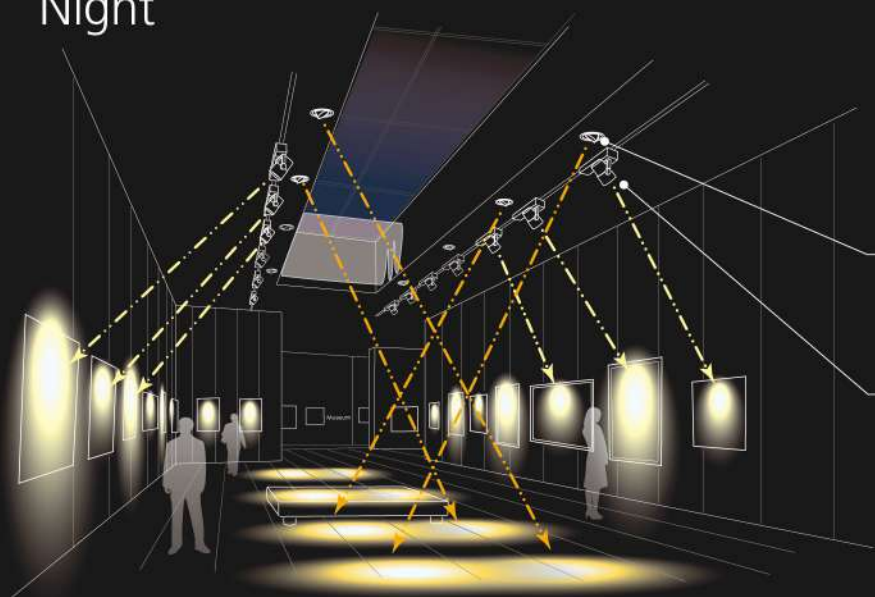


Conference

Banquet hall at a hotel
Available tables can be highlighted,
and the wedding head table is luxuriously lit.
A vibrant atmosphere can be created for business meetings.

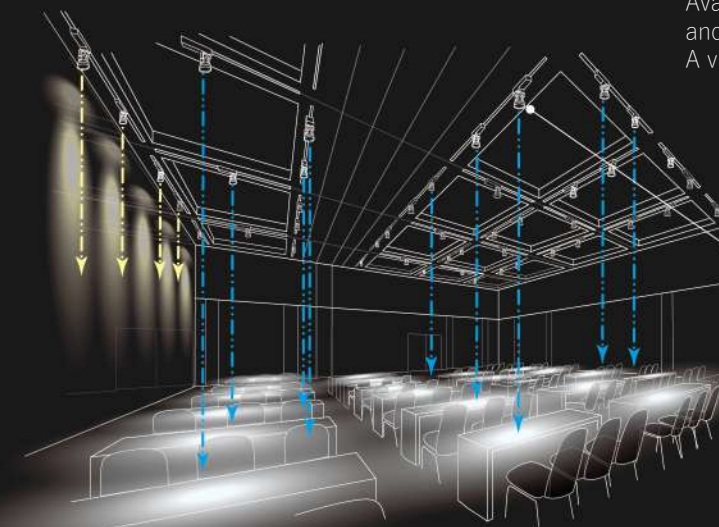


Car Showroom


Day

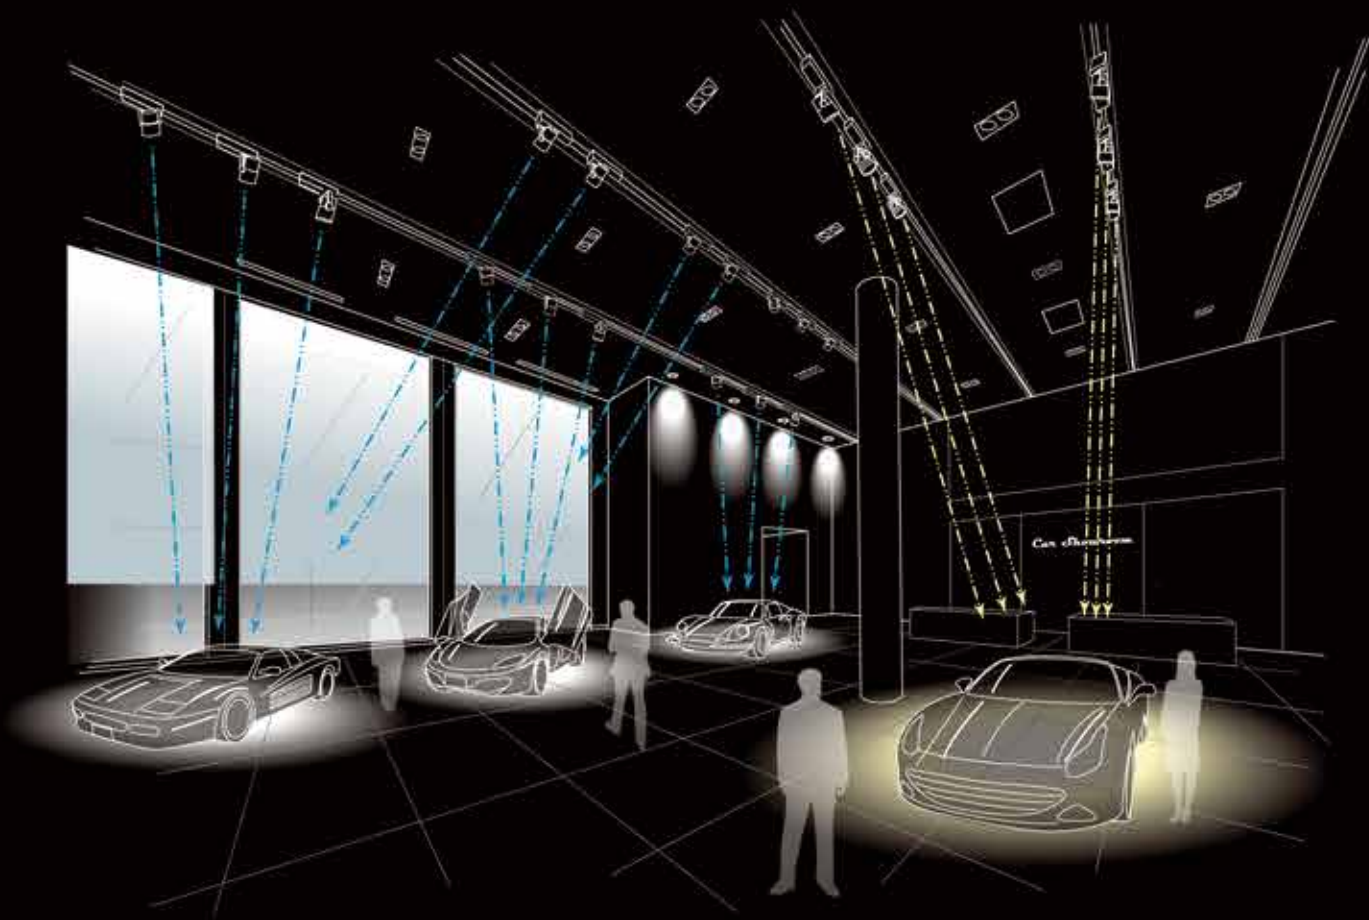


Day Body Top

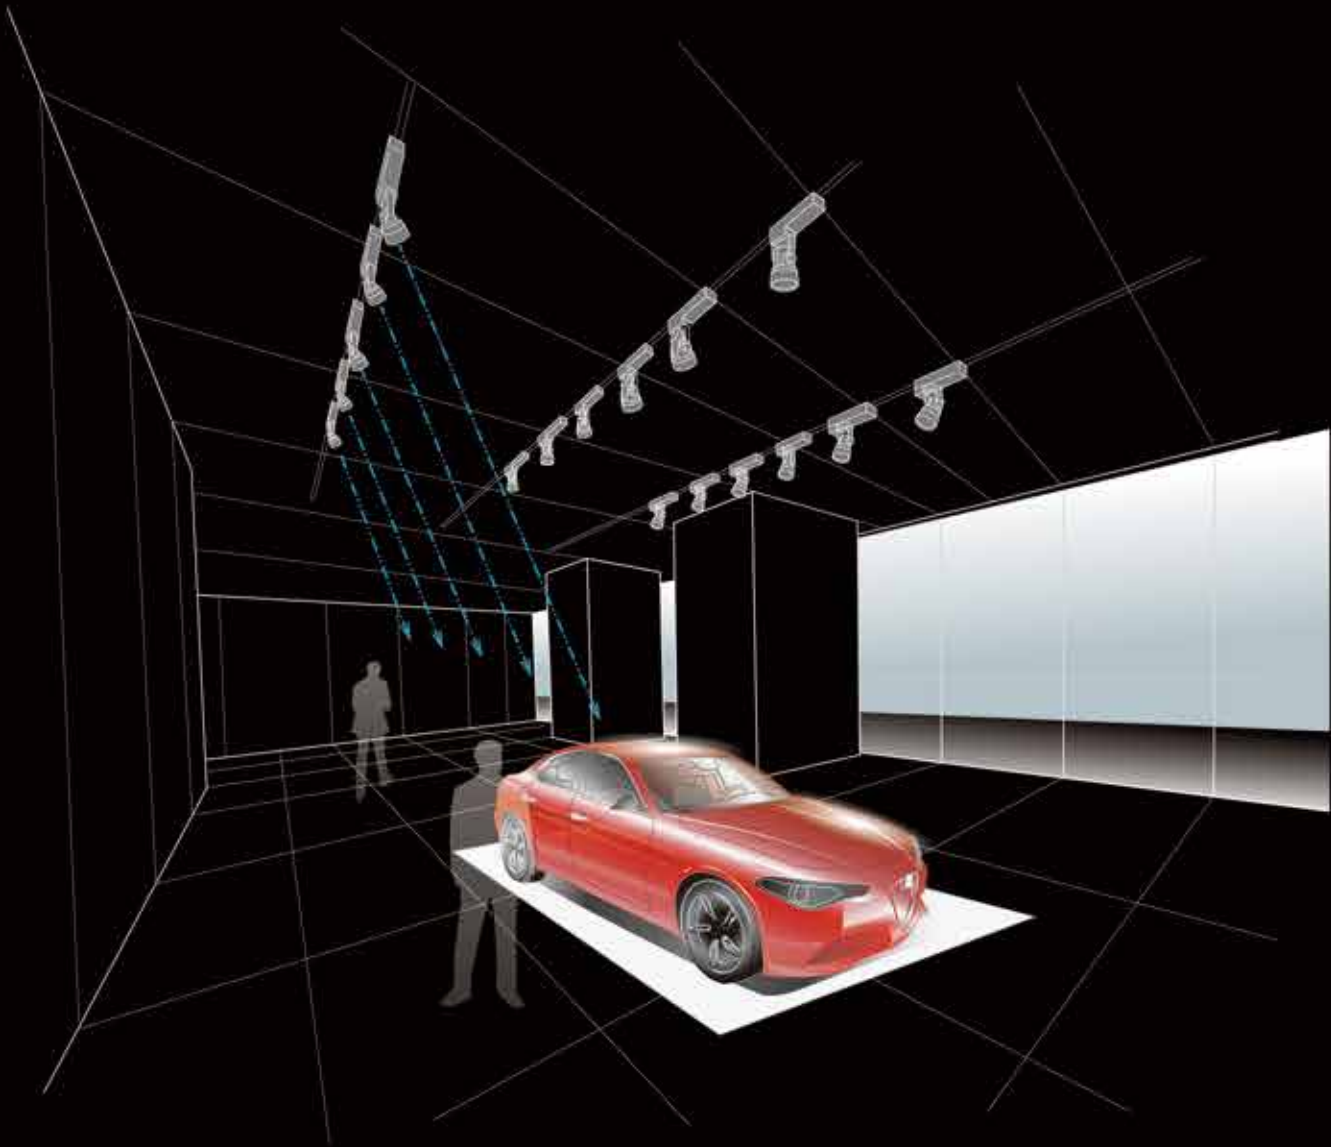


Night

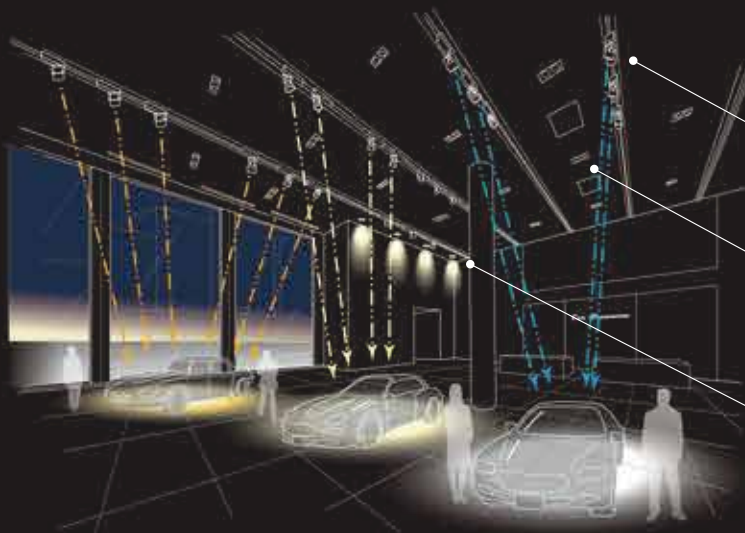


Car showroom
Bright and refreshing in the daytime, dramatic in the evening.
It also responds to changes in display scenes,
such as changes in vehicle types and display positions,
and important performances.

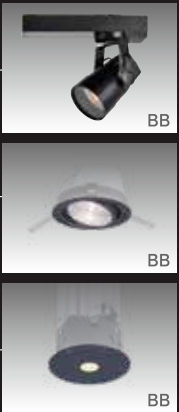

Dusk Body Side

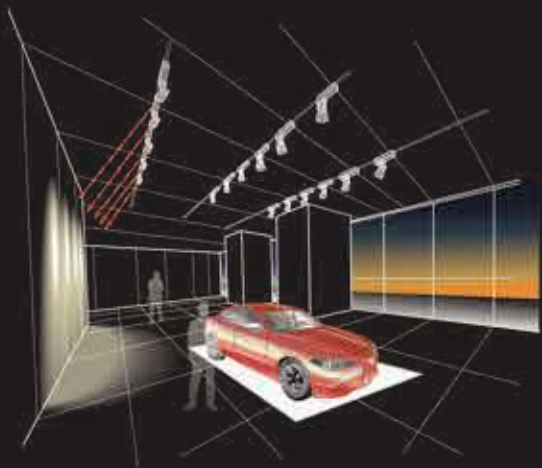

Day Body Side

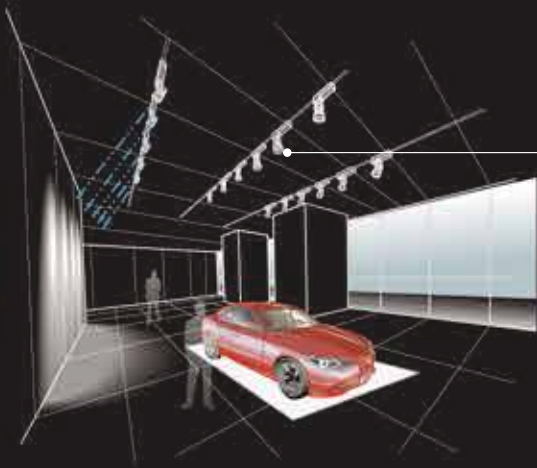


Ambient light projected on the design surface
Metallic color mixture and the design curvature
reflection enhances the changes with natural light.



Apparel Shop

Summer

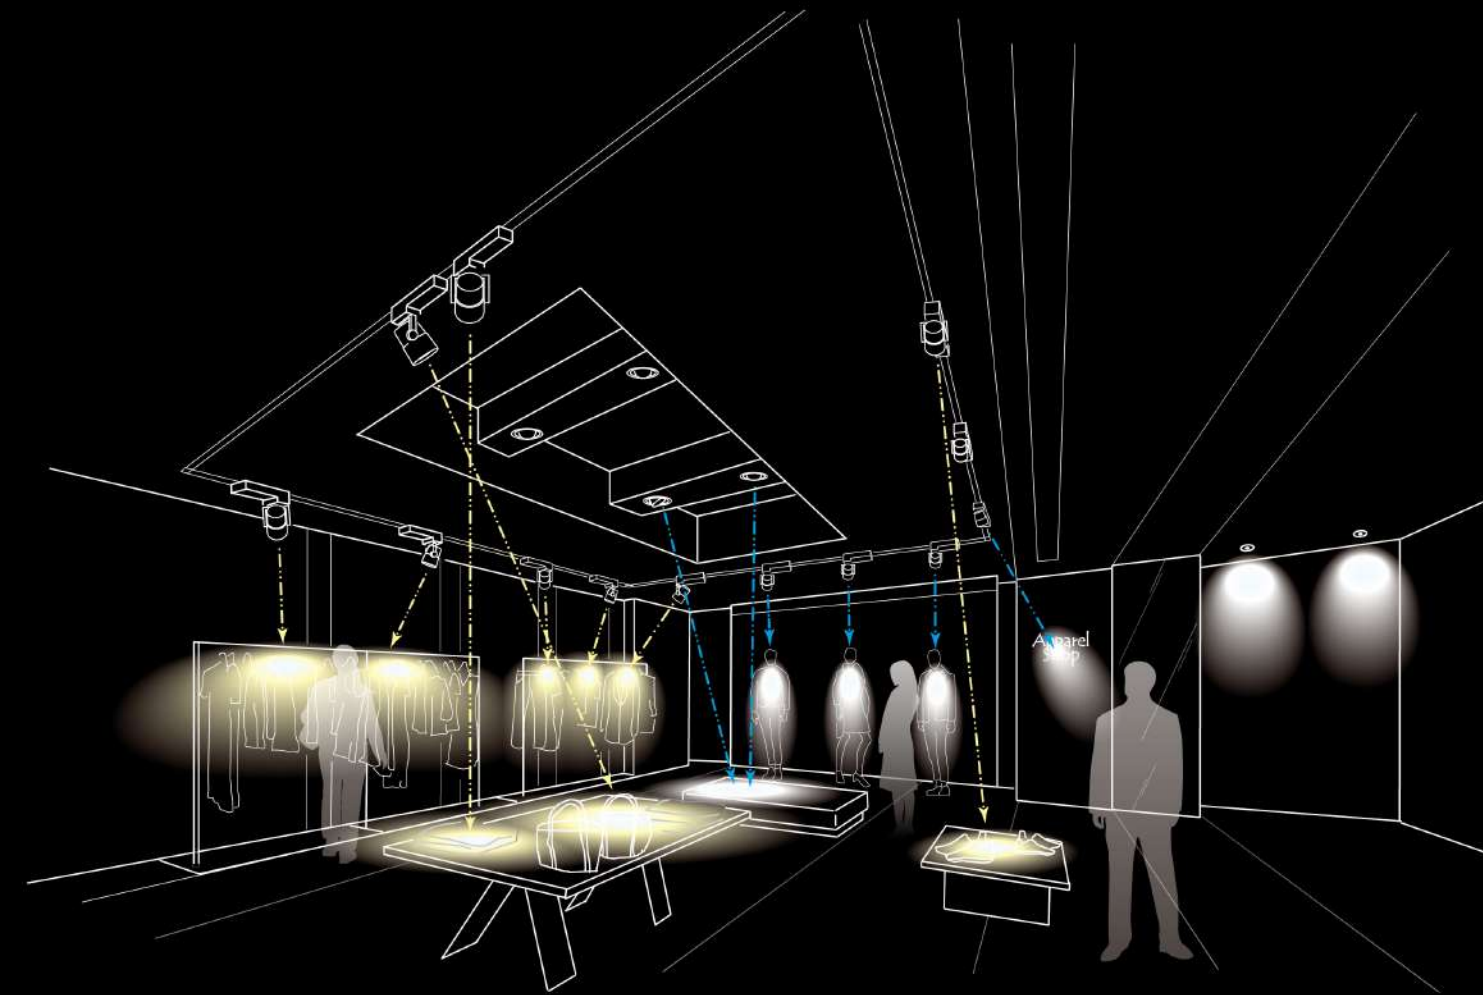


Show Window

Day



Winter

Boutiques and shops
Without having to physically touch the fixture on high ceilings,
seasonal appearances or increased attention
to valued products can be made.

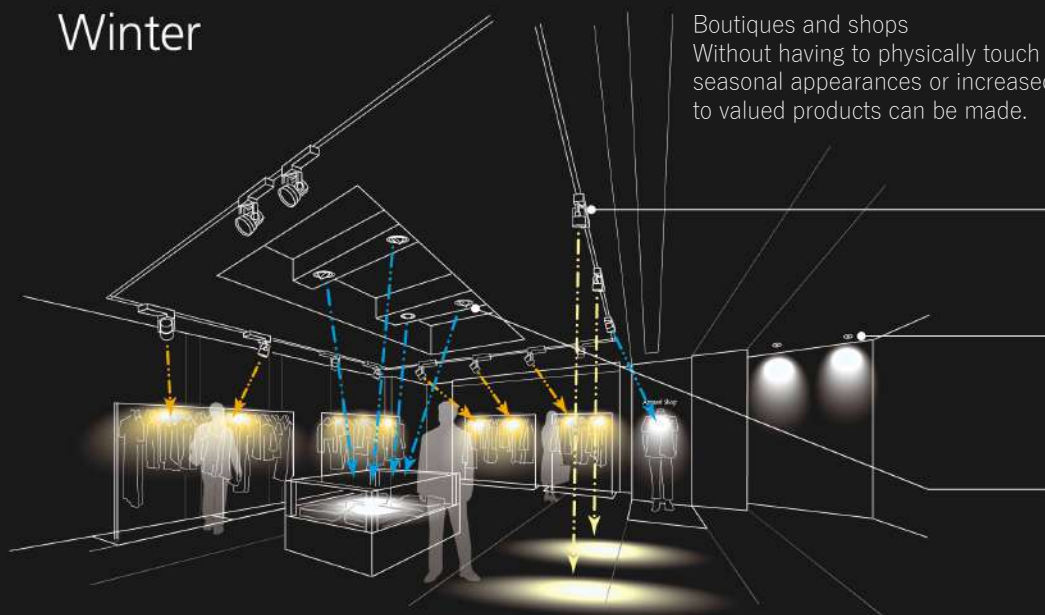

Dusk



Season

Change the essence of light into the display
High light the merchandise, mixing with natural light
the operation can be done remotely looking
at the actual environment.
Will benefit on seasonal changes as well.



SPOT LIGHT



V2



V2A



V6




V6A




V6B




V6-G1



V5



V5A



V5-WP



V4



V7

DOWN LIGHT



V1




V1A



V1 Honeycomb



V3



V3 Honeycomb




J4



J5


OPTION



Snoot (V2)




Snoot (V4)




Honeycomb (V2)



Honeycomb (V4)



Honeycomb (V6)



Snoot (V6)



Positioning Marker



Tracking Marker



SALIOT BRIDGE BOX

SALIOT MS-V2 series spotlight




V2 series 47w spotlight beam variable

Basic model with a pan, tilt, and light distribution angle change



Specification *Direct through lighting duct, for indoor use only


- Input Power : 47W (60W)
- Weight : 3.3kg
- Light Angle : 9°~34°
- Input Voltage : 100~240V
- Movement Angle(deg) : Pan 0~360° Tilt 0~90°
- CCT : 2700K, 3000K, 3500K, 4000K, 5000K
- Dimming Range :
1~100%(Luminous flux value) 1~100%(Current value)
- Color Rendering : Ra95
- Number of Saved Scenes : 3

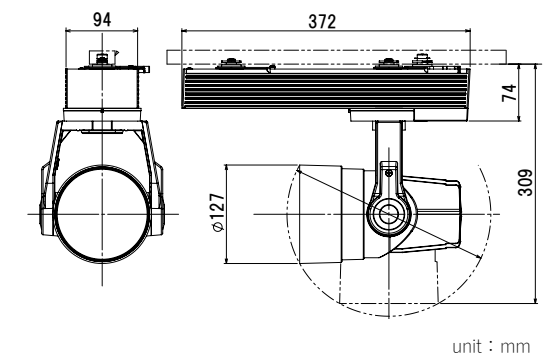


unit : mm

		2700K	3000K	3500K	4000K	5000K
Ra95	○ White	MS-V2595MB-WB	MS-V2495MB-WB	MS-V2395MB-WB	MS-V2295MB-WB	MS-V2195MB-WB
	● Black	MS-V2595MB-BB	MS-V2495MB-BB	MS-V2395MB-BB	MS-V2295MB-BB	MS-V2195MB-BB


2700K
2090lm
44.4lm/W




2700K
2360lm
50.2lm/W




3500K
2250lm
47.8lm/W




3500K
2550lm
54.2lm/W



5000K
2340lm
49.7lm/W



5000K
2650lm
56.3lm/W



※This measured data acquired from Ra95 models.

Option




V2A series 57w spotlight CCT tunable





Advanced model with tone control



- Specification** ※Direct through lighting duct, for indoor use only
- Input Power : 57W (70W)
 - Weight : 3.3kg
 - Light Angle : 14° ~ 40°
 - Input Voltage : 100~240V
 - Movement Angle(deg) : Pan 0~360° Tilt 0~90°
 - CCT : 2700K~5000K
 - Dimming Range :
8~100%(Luminous flux value) 5~100%(Current value)
 - Color Rendering : Ra83

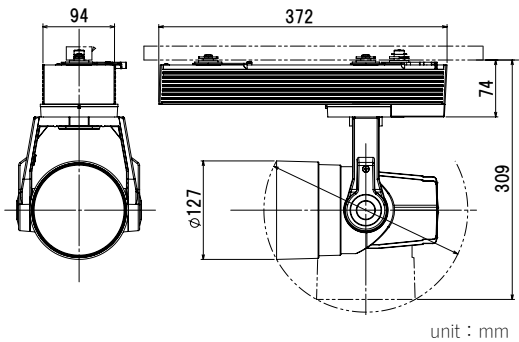

■ 2700K ~ ■ 5000K	
○ White	MS-V2A83MB-WB
● Black	MS-V2A83MB-BB

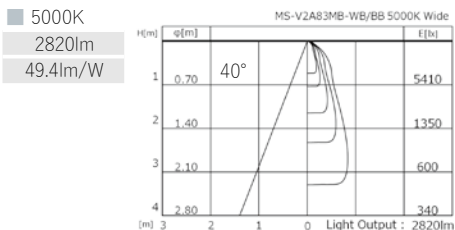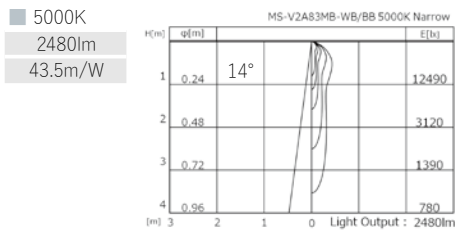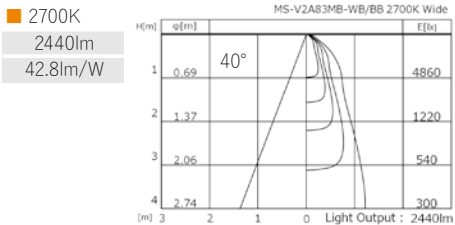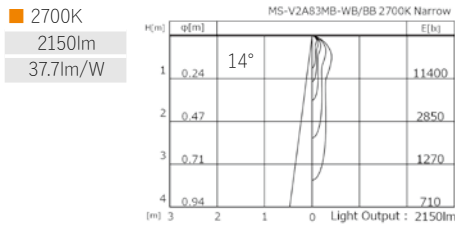

Option



AZUSA SEKKEI HEADOFFICE "HANEDA SKY CAMPUS"


V6 series 55w spotlight auto-tracking

Emergence of an auto-tracking SALIOT







SALIOT follows the marker.
Easy to adjust the exposure position.
Signals from markers are sensed and SALIOT will track automatically tracked.
Various benefits are extended.





- Specification** ※Direct through lighting duct, for indoor use only
- Input Power : 55W (60W)
 - Weight : 3.8kg
 - Light Angle : 9° ~ 34°
 - Input Voltage : 100 ~ 240V
 - Movement Angle(deg) : Pan ±270° Tilt ±80°
 - CCT : 2700K, 3000K, 3500K, 4000K, 5000K
 - Dimming Range : 1 ~ 100% (Luminous flux value) 1 ~ 100% (Current value)
 - Color Rendering : Ra93
 - Tracking Speed(shortest) : Pan 12sec (-270° ~ +270°) Tilt 3.6sec (-80° ~ +80°)

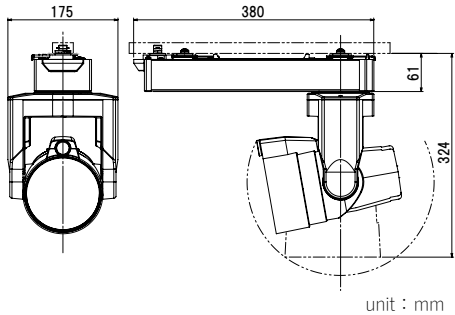

	2700K	3000K	3500K	4000K	5000K
○ White	MS-V6593MB-WB	MS-V6493MB-WB	MS-V6393MB-WB	MS-V6293MB-WB	MS-V6193MB-WB
● Black	MS-V6593MB-BB	MS-V6493MB-BB	MS-V6393MB-BB	MS-V6293MB-BB	MS-V6193MB-BB

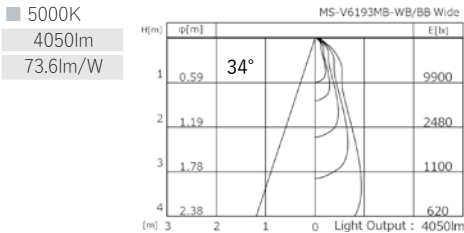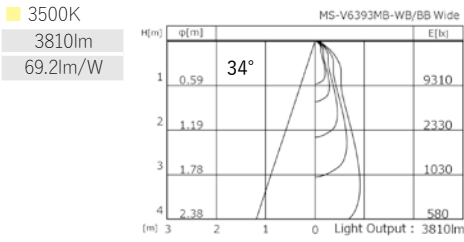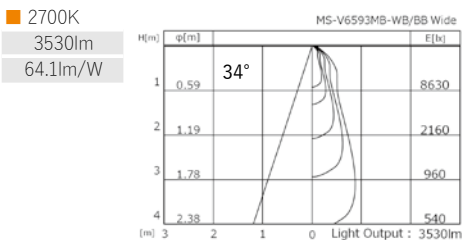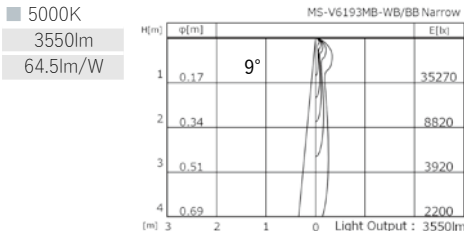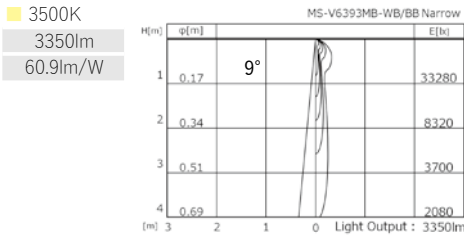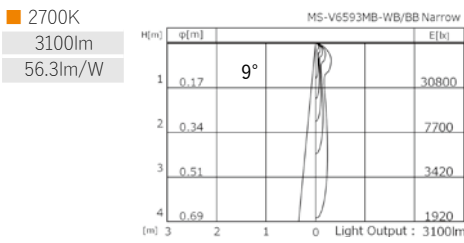

Option




MS-V-OP0026 (B)
MS-V-OP0025 (W)

Application


Positioning

Place the marker at the position to be tracked and switch on.
The SALIOT is guided by the markers and the positioning will be completed.
The lighting adjustment is completed with one touch.
It is possible to drastically reduce work at heights.

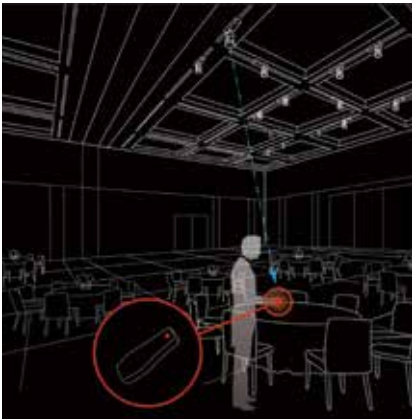


Tracking

By acquiring tracking markers, the SALIOT tracks people.
Tracks presenters moving to various positions on the platform.
Several presenters can be tracked simultaneously using several tracking markers and SALIOT.

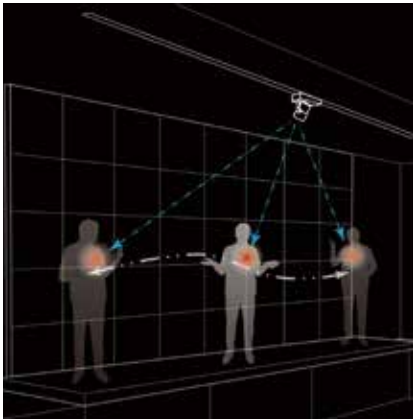

Programming function

A new programming function is installed.
By programming and playing up to 16 scenes, it is possible to simply express moving lights.
For details on the setting conditions of the function, please contact us.

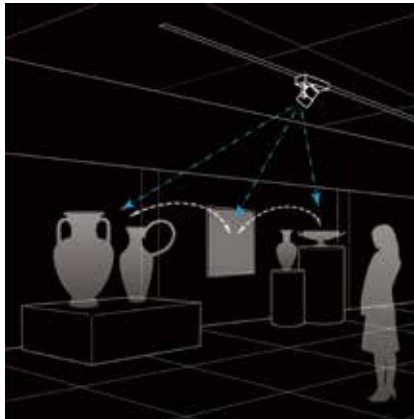


There are restrictions on the programming function settings of the V6 series.


- The drive time and pause time should be 1:4, and the drive time should be up to a total of 2 hours per day.
- When the programming function is performed, only the pan tilt should be driven.(Do not include variable light distribution angle)
- For continuous tracking in tracking mode, the duration of continuous drive should be up to 2 times. After that, it takes 8 times to stop the drive.

V6-G1 series spotlight hanger type

Hanger Attachment Type



- Specification** ※Only for hanger type mount
- Weight : 4kg
 - Input Voltage : 100V
 - Movement Angle(deg) : Pan ±270° Tilt ±80°
 - Movement Angle(deg) : Pan 12sec (-270° ~ +270°) Tilt 3.6sec (-80° ~ +80°)
 - Number of Saved Scenes : 16
 - ※Hanger clamp is not included in the system
 - ※Each specification is depended on the base model.
 - Please contact for further detail information.

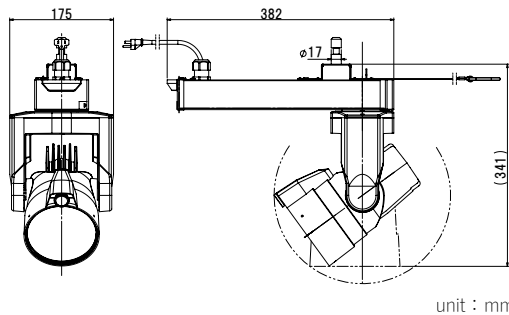


V6A series 55w spotlight CCT tunable





Advanced model with color tone control in addition to tracking function





- Specification** ※Direct through lighting duct, for indoor use only
- Input Power : 57W (61W)
 - Weight : 3.8kg
 - Light Angle : 14° ~ 40°
 - Input Voltage : 100~240V
 - Movement Angle(deg) : Pan ±270° Tilt ±80°
 - CCT : 2700K~5000K
 - Dimming Range : 15~100% (Luminous flux value) 10~100% (Current value)
 - Color Rendering : Ra83
 - Tracking Speed(shortest) : Pan 12sec (-270° ~ +270°) Tilt 3.6sec (-80° ~ +80°)

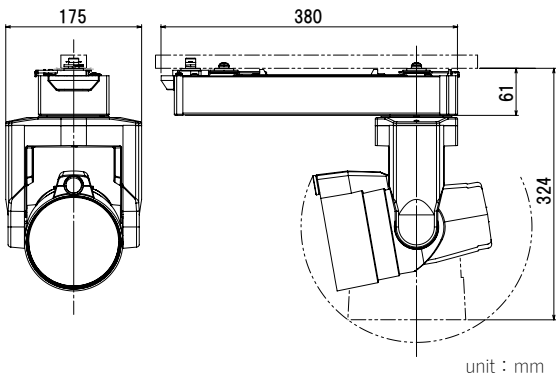

Ra83	○ White	MS-V6A83MB-WB
	● Black	MS-V6A83MB-BB

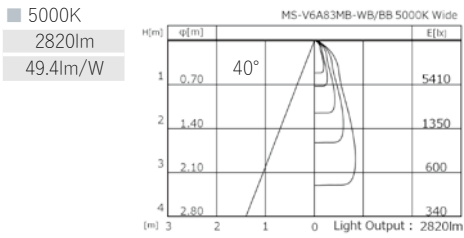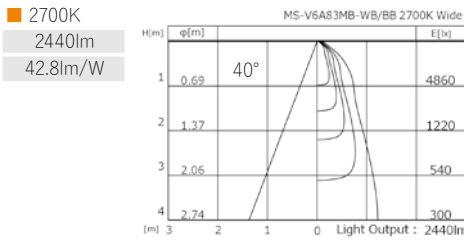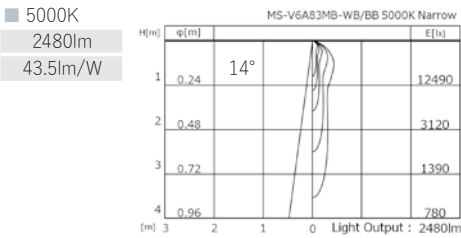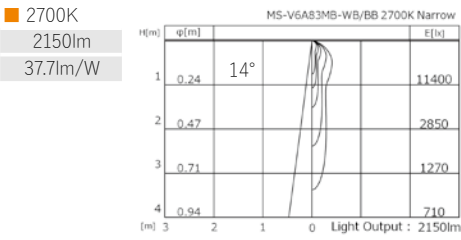

Option



MS-V-OP0026 (B)
MS-V-OP0025 (W)

V6B series 43w spotlight fullcolor


Full-color※ models using RGBW and four-color blending

- A wide range of light colors are reproduced by adding white light to three primary colors of light: red, green, and blue.
- You can save or recall the color of your preference.
- The optional marker also supports the automatic tracking function.



○ White	MS-V6B70MB-WB
● Black	MS-V6B70MB-BB

- ※9.21 million
- Specification** ※Direct through lighting duct, for indoor use only
- Input Power : 43W (52W)
 - Weight : 3.8kg
 - Light Angle : 16° ~ 40°
 - Input Voltage : 100~240V
 - Movement Angle(deg) : Pan ±270° Tilt ±80°
 - Dimming Range : 1~100% (Luminous flux value) 1~100% (Current value)
 - Tracking Speed(shortest) : Pan 12sec (-270° ~ +270°) Tilt 3.6sec (-80° ~ +80°)
 - Number of Saved Scenes : 16

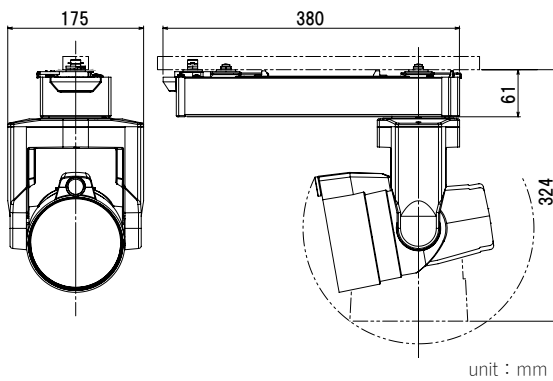

Option IR device for auto-tracking Model

Marker

MS-V-OP0003

Positioning

MS-V-OP0009

Tracking



- Specification**
- Maximum IR Transmission Distance : about 10m
※Depends on the conditions of the room
 - Emitting Transmission Angle : +/-25 degrees from center of beam
 - Power : Two AA dry batteries (optional)
 - External Dimensions : 35x120x19mm





- Specification**
- Maximum IR Transmission Distance : about 10m
※Depends on the conditions of the room
 - Emitting Transmission Angle : +/-50 degrees from center of beam
 - Power : Two AA dry batteries (optional)
 - External Dimensions : 34x64x30mm

SALIOT "CUBE" spotlight

V5 series 60w SALIOT CUBE beam variable


Straight-line architectural design

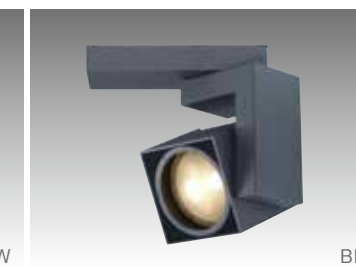

Specification


※Direct through lighting duct, for indoor use only

- Input Power : 60W (72W)
- Weight : 3.9kg
- Light Angle : 9° ~ 34°
- Input Voltage : 100~240V
- Movement Angle(deg) : Pan 0~360° Tilt 0~90°
- CCT : 2700K, 3000K, 3500K, 4000K, 5000K
- Dimming Range :
1~100% (Luminous flux value) 1~100% (Current value)
- Color Rendering : Ra95

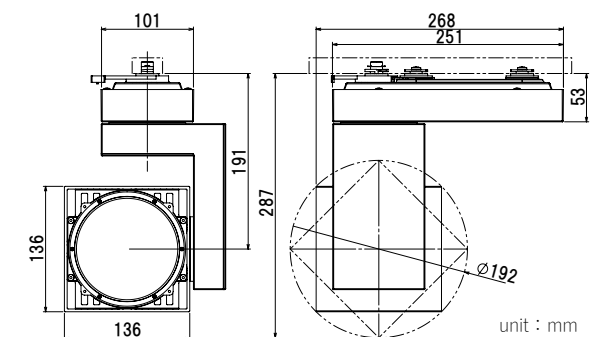


		2700K	3000K	3500K	4000K	5000K
Ra95	○ White	MS-V5595MB-WW	MS-V5495MB-WW	MS-V5395MB-WW	MS-V5295MB-WW	MS-V5195MB-WW
	● Black	MS-V5595MB-BB	MS-V5495MB-BB	MS-V5395MB-BB	MS-V5295MB-BB	MS-V5195MB-BB


2700K
3100lm
51.6lm/W




2700K
3230lm
53.8lm/W

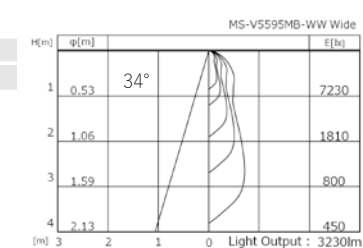


3500K
3350lm
55.8lm/W




3500K
3500lm
58.3lm/W

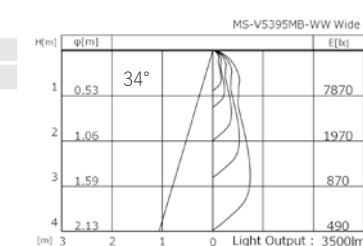

5000K
3480lm
58.0lm/W



5000K
3630lm
60.5lm/W

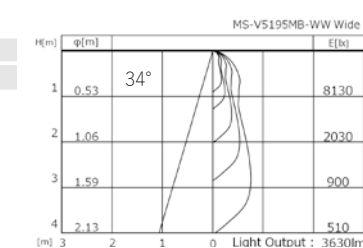

※ This acquisitions is Ra95 our measured data for white models.

**GOOD DESIGN
AWARD 2016**

**DESIGN
AWARD
2017**


**MERIT
AWARD
2017**

V5A series 65w SALIOT CUBE spotlight CCT tunable


Advanced model with tone control



- Specification** ※Direct through lighting duct, for indoor use only
- Input Power : 65W (78W)
 - Weight : 3.9kg
 - Light Angle : 14° ~ 40°
 - Input Voltage : 100~240V
 - Movement Angle(deg): Pan 0~360° Tilt 0~90°
 - CCT : 2700K~5000K
 - Dimming Range :
15~100% (Luminous flux value) 10~100% (Current value)
 - Color Rendering : Ra83

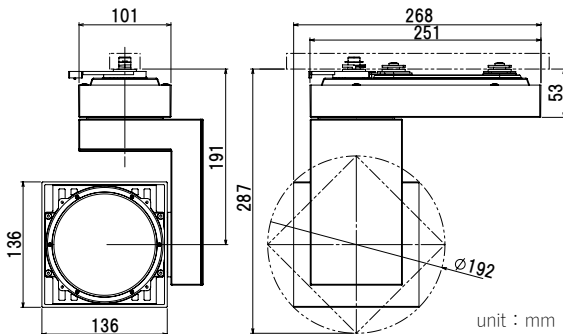

Ra83	○ White	■ 2700K ~ ■ 5000K
	● Black	

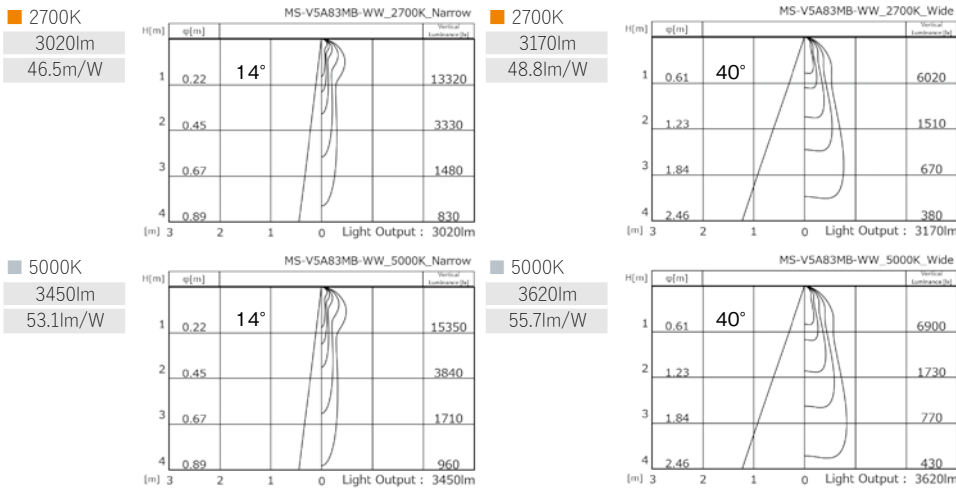


V5-WP series 55w SALIOT CUBE spotlight Water drop resistant


Water Drop resistant (IP54) models that can be used under the eaves



- Specification** ※Designed for direct ceiling mount on eaves only
- Input Power : 55W (66W)
 - Weight : 4.4kg
 - Light Angle : 9° ~ 34°
 - Input Voltage : 100~240V
 - Movement Angle(deg): Pan 0~360° Tilt 0~90°
 - CCT : 2700K, 3000K, 3500K, 4000K, 5000K
 - Dimming Range :
1~100% (Luminous flux value) 1~100% (Current value)
 - Color Rendering : Ra95

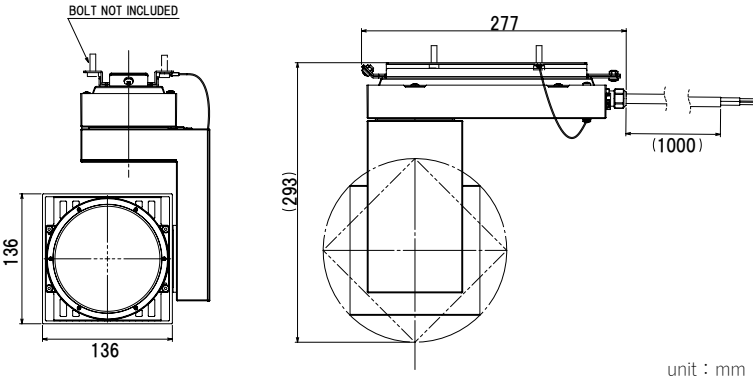

Ra95	○ White	■ 2700K	■ 3000K	■ 3500K	■ 4000K	■ 5000K
	● Black	MS-V5595MB-WW-WP	MS-V5495MB-WW-WP	MS-V5395MB-WW-WP	MS-V5295MB-WW-WP	MS-V5195MB-WW-WP

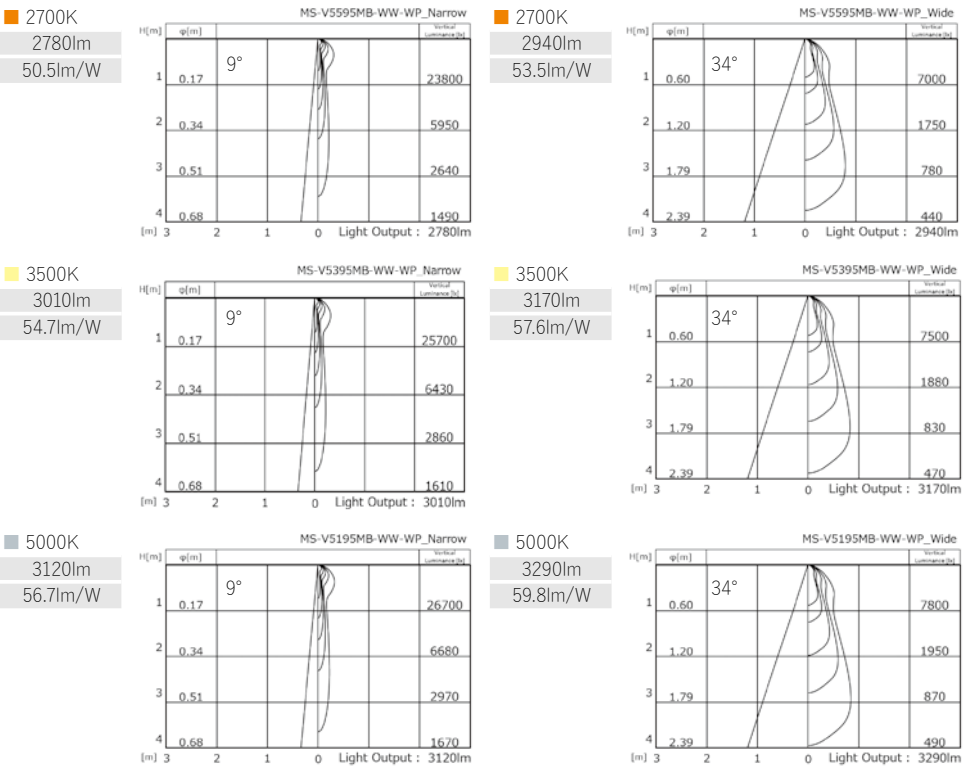



SALIOT MS-V4 series spotlight

V4 series 24w spotlight

Compact, lightweight model with basic functionality




- Specification** ※Direct through lighting duct, for indoor use only
- Input Power : 24W (25.5W)
 - Weight : 2.4kg
 - Light Angle : 12° ~ 34° ※Light angle adjustment can be done manually
※White body color model
 - Input Voltage : 100~240V
 - Movement Angle(deg) : Pan 0~355° Tilt 0~90°
 - CCT : 2700K, 3000K, 3500K, 4000K, 5000K
 - Dimming Range :
1~100% (Luminous flux value) 1~100% (Current value)
 - Color Rendering : Ra95
 - Number of Saved Scenes : 5

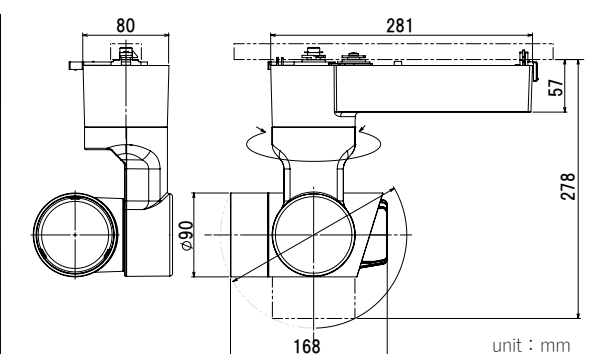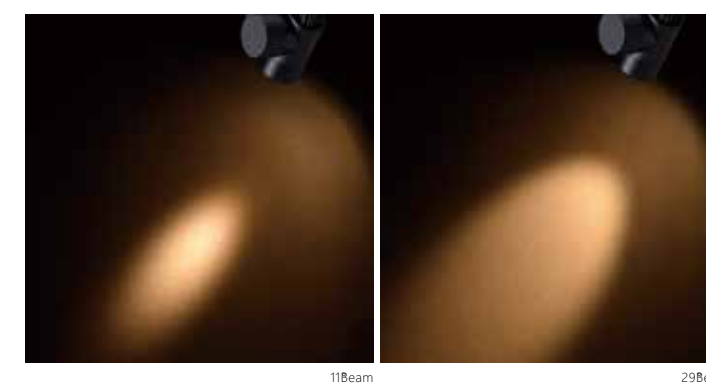


		2700K	3000K	3500K	4000K	5000K
Ra95	○ White	MS-V4595MB-WW	MS-V4495MB-WW	MS-V4395MB-WW	MS-V4295MB-WW	MS-V4195MB-WW
	● Black	MS-V4595MB-BB	MS-V4495MB-BB	MS-V4395MB-BB	MS-V4295MB-BB	MS-V4195MB-BB


2700K
920lm
38.3lm/W




2700K
1110lm
46.3lm/W




3500K
1000lm
41.7lm/W




3500K
1210lm
50.4lm/W



5000K
1030lm
42.9lm/W



5000K
1250lm
52.1lm/W



※ This actual measured data is from white model (WW) of the Ra95, body color at the inside of the emitter area.


Option



SALIOT MS-V7 series spotlight

V7 series 27W spotlight with fixed narrow beam

Smaller model with the same basic functions
With 6.5 degree light distribution

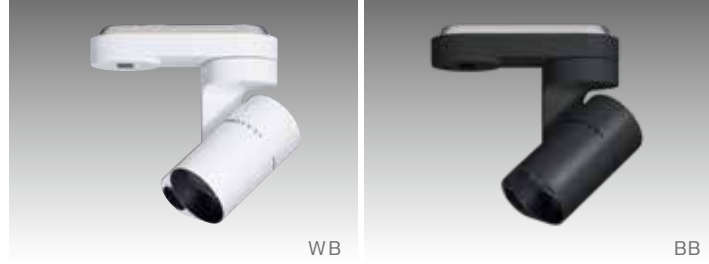

WB

BB

Ra 93

6.5°

1-100%

+360°~180°


±90°

TRACKING

Specification



※Direct through lighting duct, for indoor use only

- Input Power : 27W (29W)
- Weight : 2kg
- Light Angle : 6.5° ※Fixed
- Input Voltage : 100~240V
- Movement Angle(deg): Pan ±360° ~ ~180° Tilt ±90°
- CCT : 2700K, 3000K, 3500K, 4000K, 5000K
- Dimming Range :
1~100% (Luminous flux value) 1~100% (Current value)
- Color Rendering : Ra93

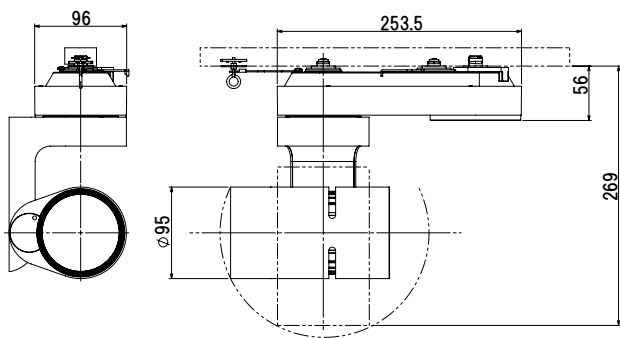

unit : mm

		2700K	3000K	3500K	4000K	5000K
Ra93	○ White	MS-V7593MB-WB	MS-V7493MB-WB	MS-V7393MB-WB	MS-V7293MB-WB	MS-V7193MB-WB
	● Black	MS-V7593MB-BB	MS-V7493MB-BB	MS-V7393MB-BB	MS-V7293MB-BB	MS-V7193MB-BB

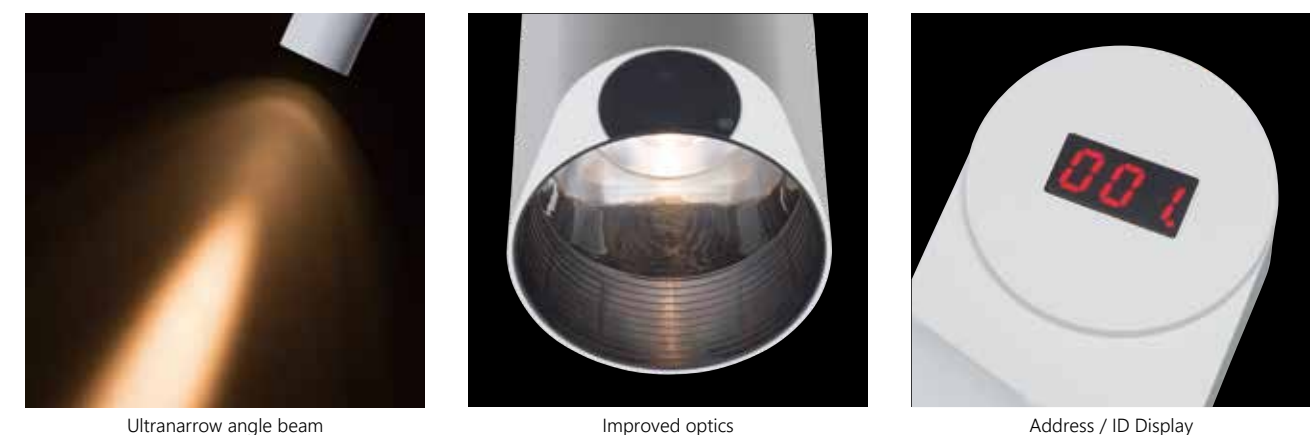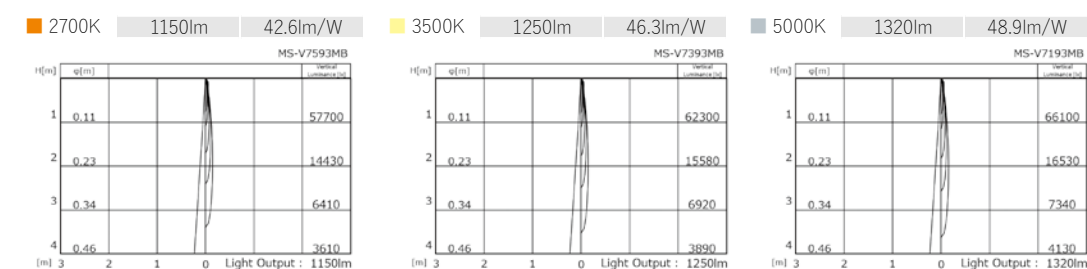

SALIOT MS-V1 series downlight

V1 series $\phi 175$ universal downlight

Universal downlights that incorporate the function of the pan and tilt





Specification

- ※Direct installation to ceiling, for indoor use only
- Input Power : 44W (57W)
- Weight : 2.5kg
- Light Angle : 12°, 24°, 33°
- Input Voltage : 100~240V
- Movement Angle(deg): Pan 0~355° Tilt -35°~+45°
- CCT : 2700K, 3000K, 3500K, 4000K, 5000K
- Dimming Range : 1~100% (Luminous flux value) 1~100% (Current value)
- Color Rendering : Ra95
- Number of Saved Scenes : 5
- Embedded Hole Diameter : $\phi 175$
- M type General Construction
- Inclined Ceiling Impossible




GLENBARRA ART MUSEUM
Distributed by YAMAGIWA

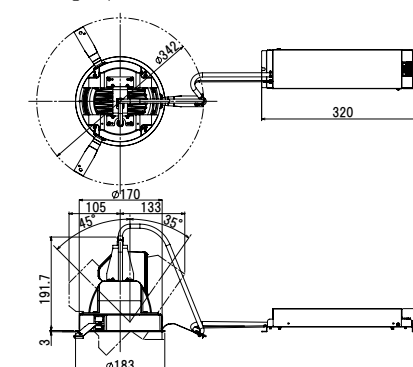

unit : mm

		2700K	3000K	3500K	4000K	5000K
Ra95	○ White	MS-V1595MB-WW	MS-V1495MB-WW	MS-V1395MB-WW	MS-V1295MB-WW	MS-V1195MB-WW
	● Black	MS-V1595MB-BB	MS-V1495MB-BB	MS-V1395MB-BB	MS-V1295MB-BB	MS-V1195MB-BB

※Refer to the trailing symbol for the light distribution angle. ※No end suffix for part number: 12° -0B:24° -0C:33°

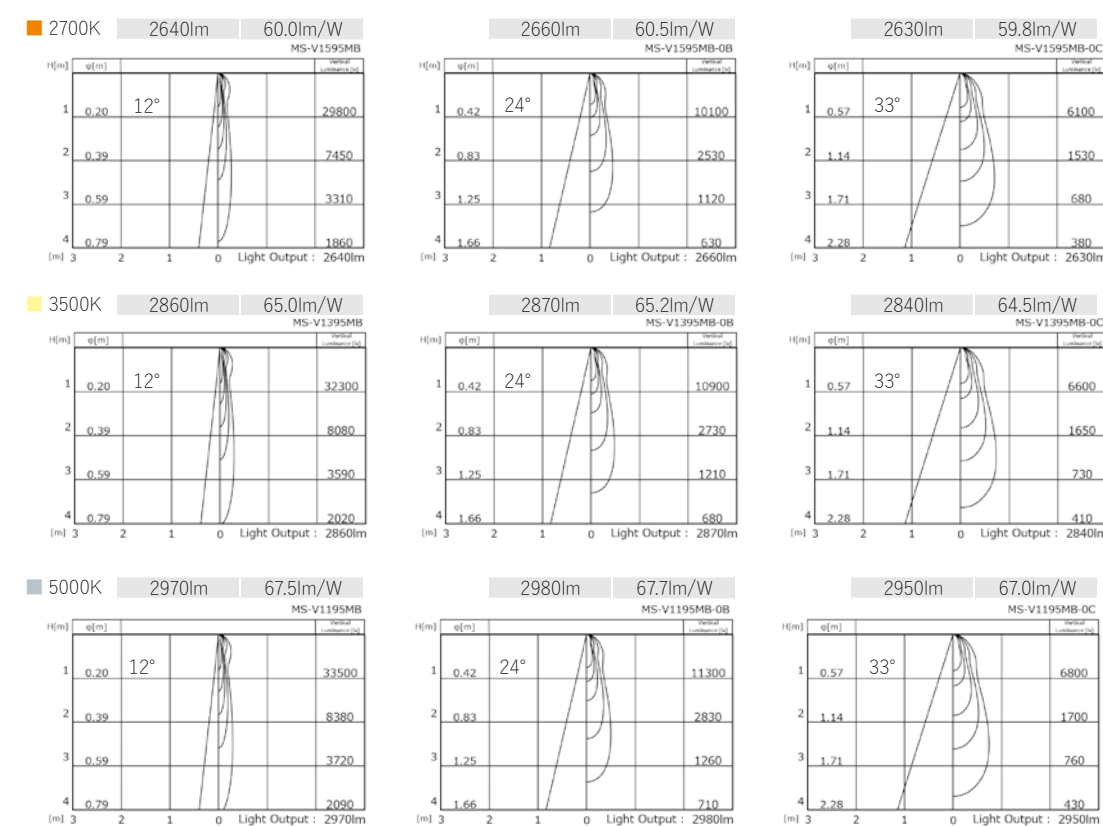

※This acquisitions is Ra95 our measured data for white models.


V1A series $\phi 175$ universal downlight CCT tunable

In addition to the basic performance of the pan and tilt,
the color tone control is also included












- Specification** ※Direct installation to ceiling, for indoor use only
- Input Power : 44W (57W)
 - Weight : 2.5kg
 - Light Angle : 15°、26°、37°
 - Input Voltage : 100~240V
 - Movement Angle(deg) : Pan 0~355° Tilt -35°~+45°
 - CCT : 2700K~5000K
 - Dimming Range :
8~100% (Luminous flux value) 5~100% (Current value)
 - Color Rendering : Ra83
 - Number of Saved Scenes : 5
 - Embedded Hole Diameter: $\phi 175$
 - M type General Construction
 - Inclined Ceiling Impossible

175
 $\phi 175$
Ceiling thickness: 7mm~25mm

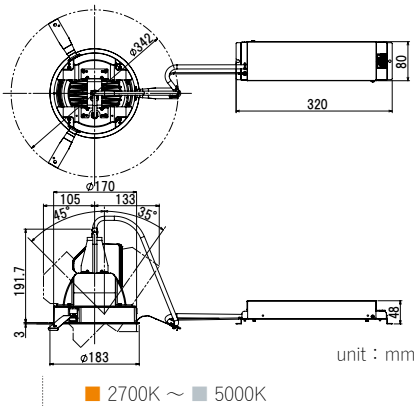

- 2700K ~ 5000K
- White MS-V1A83MB-WW
● Black MS-V1A83MB-BB

※Refer to the trailing symbol for the light distribution angle.
※No end suffix for part number:15° -0B:26° -0C:37°




Main Building, Central passage
ISETAN Shinjuku Store




Takayanagi Eye Clinic

V1 series $\phi 175$ universal downlight with honeycomb

Universal Downlight now available with honeycomb

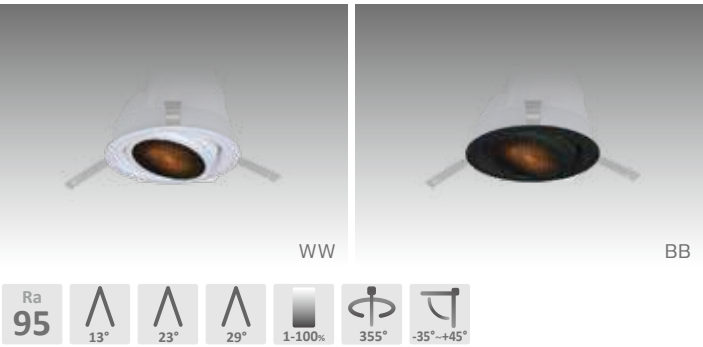


- Specification** ※Direct installation to ceiling, for indoor use only
- Input Power : 44W (57W)
 - Weight : 2.8kg
 - Light Angle : 13°、23°、29°
 - Input Voltage : 100~240V
 - Movement Angle(deg): Pan 0~355° Tilt -35°~+45°
 - CCT : 2700K、3000K、3500K、4000K、5000K
 - Dimming Range: 1~100% (Luminous flux value) 1~100% (Current value)
 - Color Rendering : Ra95
 - Number of Saved Scenes : 5
 - Embedded Hole Diameter: $\phi 175$
 - M type General Construction
 - Inclined Ceiling Impossible

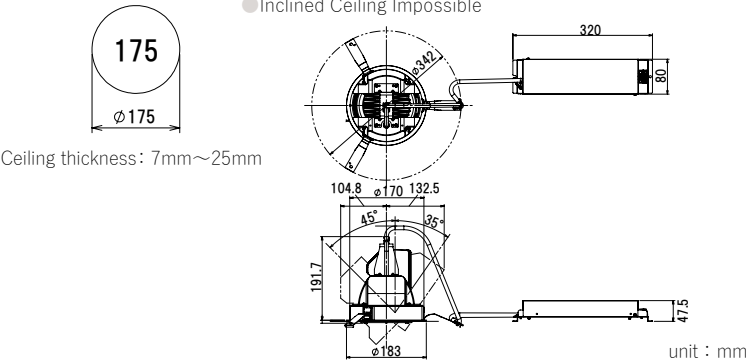


Ra95	Color	2700K	3000K	3500K	4000K	5000K
		MS-V1595MB-WW-HA MS-V1595MB-BB-HA	MS-V1495MB-WW-HA MS-V1495MB-BB-HA	MS-V1395MB-WW-HA MS-V1395MB-BB-HA	MS-V1295MB-WW-HA MS-V1295MB-BB-HA	MS-V1195MB-WW-HA MS-V1195MB-BB-HA

※Refer to the trailing symbol for the light distribution angle. ※HA:13° HB:23° HC:29°

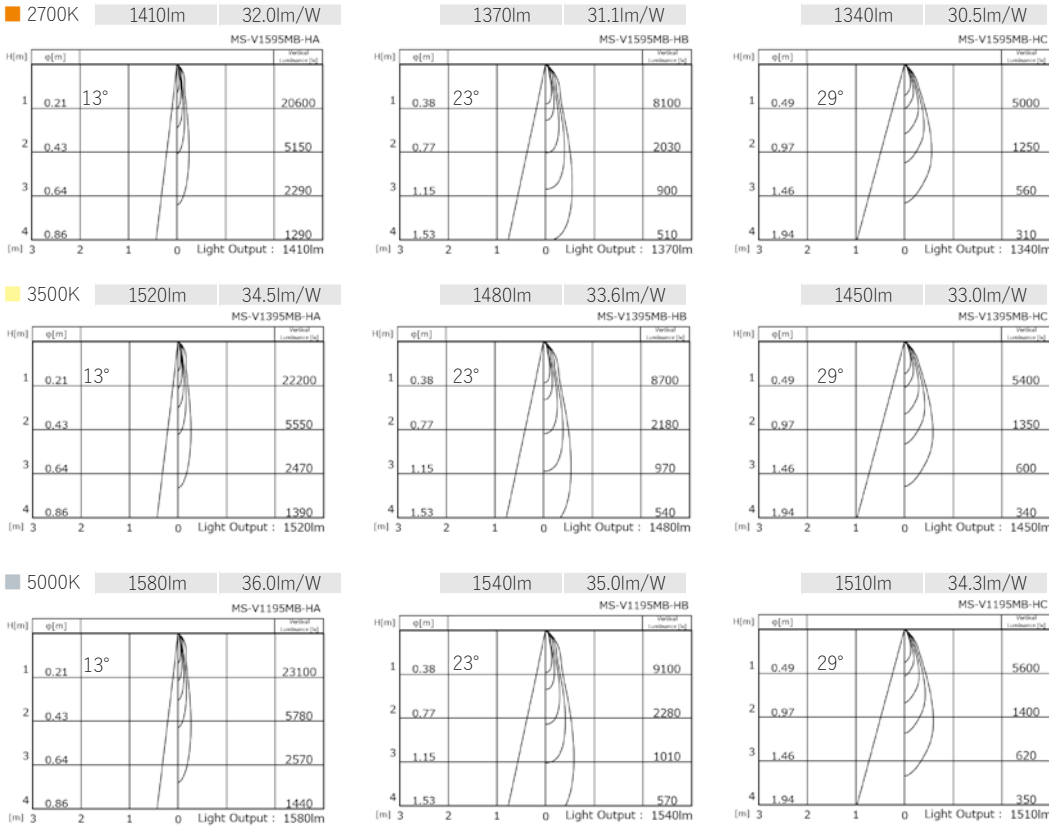


V1A series $\phi 175$ universal downlight CCT tunable

Universal Downlight Color Tone control type with honeycomb

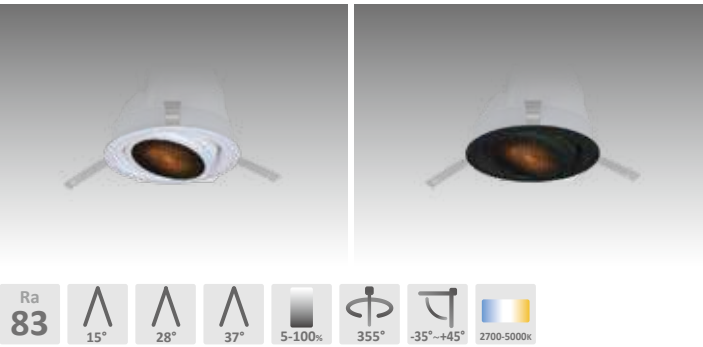


- Specification** ※Direct installation to ceiling, for indoor use only
- Input Power : 35W (40W)
 - Weight : 2.8kg
 - Light Angle : 15°、28°、37°
 - Input Voltage : 100~240V
 - Movement Angle(deg): Pan 0~355° Tilt -35°~+45°
 - CCT : 2700K~5000K
 - Dimming Range: 8~100% (Luminous flux value) 5~100% (Current value)
 - Color Rendering : Ra83
 - Number of Saved Scenes : 5
 - Embedded Hole Diameter: $\phi 175$
 - M type General Construction
 - Inclined Ceiling Impossible

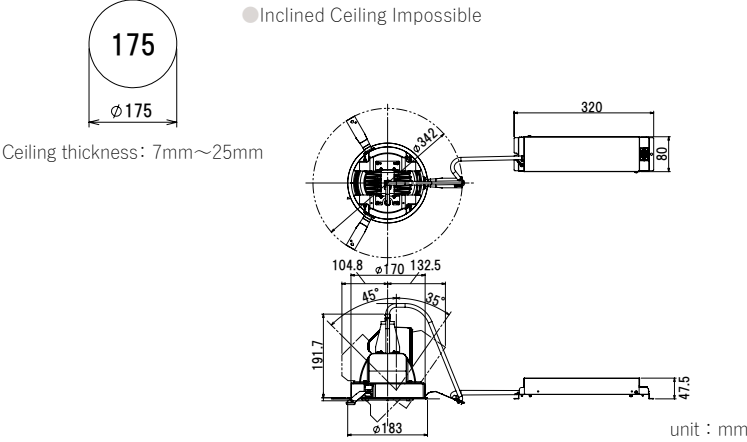

Ra83	Color	2700K ~ 5000K
		MS-V1A83MB-WW-HA MS-V1A83MB-BB-HA

※Refer to the trailing symbol for the light distribution angle. ※HA:15° HB:28° HC:37°

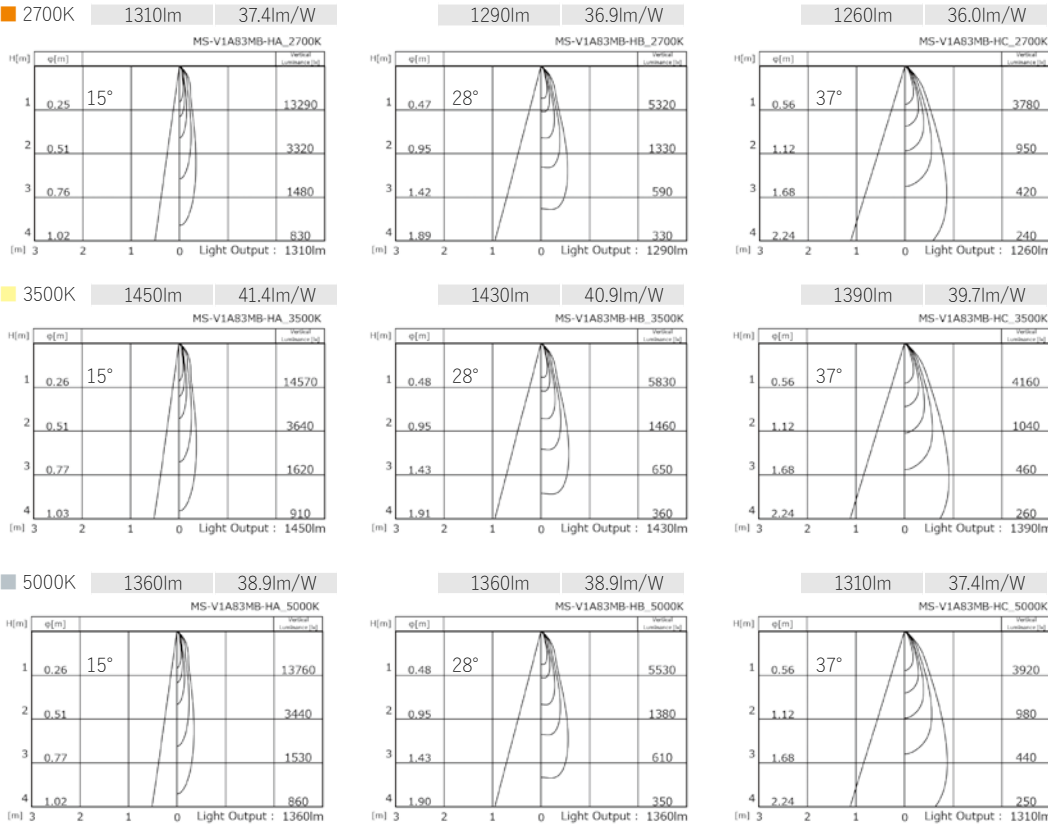


※ This acquisitions is Ra95 our measured data for white models.

SALIOT MS-V3 series downlight




V3 series $\phi 125$ universal downlight

Reducing the size but keeping the pan and tilt function

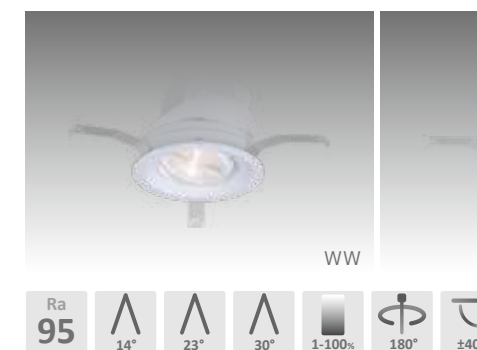

- Specification** ※Direct installation to ceiling, for indoor use only
- Input Power : 24W (25.5W)
 - Weight : 1.2kg
 - Light Angle : 14° , 23° , 30°
 - Input Voltage : 100~240V
 - Movement Angle(deg) : Pan 0~180° Tilt -40° ~ +40°
 - CCT : 2700K, 3000K, 3500K, 4000K, 5000K
 - Dimming Range : 1~100% (Luminous flux value) 1~100% (Current value)
 - Color Rendering : Ra95
 - Number of Saved Scenes : 5
 - Embedded Hole Diameter: $\phi 125$
 - M type General Construction
 - Inclined Ceiling Impossible


$\phi 125$
Ceiling thickness: 7mm~25mm

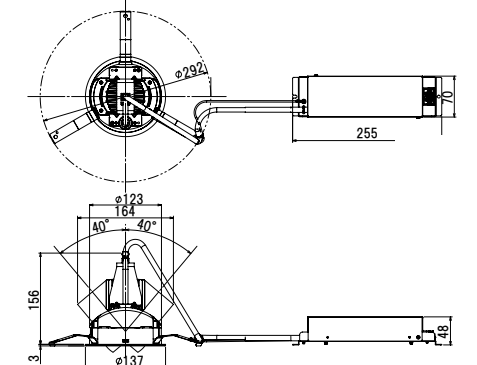

unit : mm


	2700K	3000K	3500K	4000K	5000K
○ White	MS-V3595MB-WW	MS-V3495MB-WW	MS-V3395MB-WW	MS-V3295MB-WW	MS-V3195MB-WW
● Black	MS-V3595MB-BB	MS-V3495MB-BB	MS-V3395MB-BB	MS-V3295MB-BB	MS-V3195MB-BB

※Refer to the trailing symbol for the light distribution angle. ※No end suffix for part number: 14° -0B:23° -0C:30°

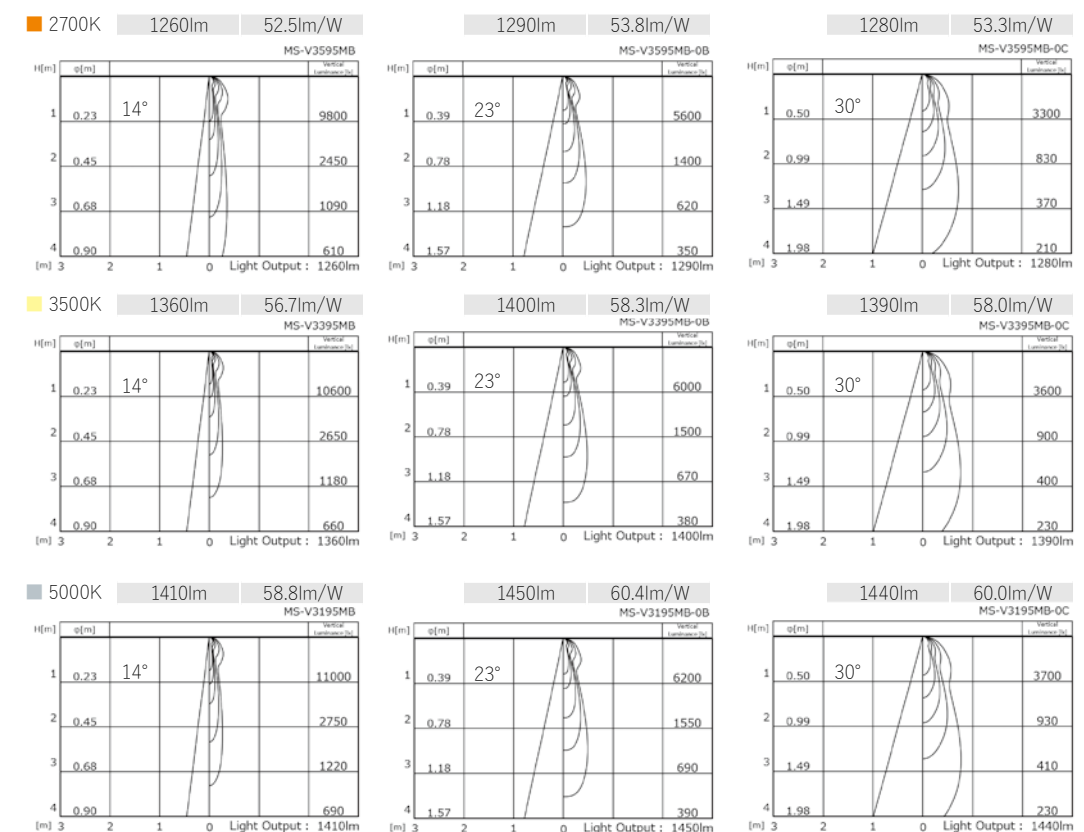


V3 series $\phi 125$ universal downlight with honeycomb

Small Universal Downlight now available with honeycomb

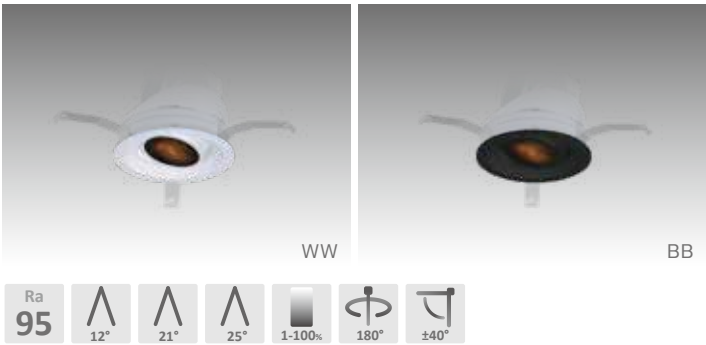


- Specification** ※Direct installation to ceiling, for indoor use only
- Input Power : 18W (19W)
 - Weight : 1.3kg
 - Light Angle : 12°、21°、25°
 - Input Voltage : 100~240V
 - Movement Angle(deg) : Pan 0~180° Tilt -40° ~+40°
 - CCT : 2700K、3000K、3500K、4000K、5000K
 - Dimming Range :
1~100% (Luminous flux value) 1~100% (Current value)
 - Color Rendering : Ra95
 - Number of Saved Scenes : 5
 - Embedded Hole Diameter : $\phi 125$
 - M type General Construction
 - Inclined Ceiling Impossible

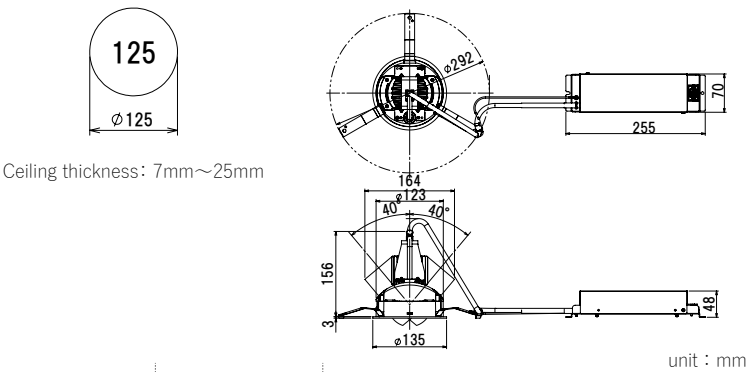


		2700K	3000K	3500K	4000K	5000K
Ra95	○ White	MS-V3595MB-WW-HA	MS-V3495MB-WW-HA	MS-V3395MB-WW-HA	MS-V3295MB-WW-HA	MS-V3195MB-WW-HA
	● Black	MS-V3595MB-BB-HA	MS-V3495MB-BB-HA	MS-V3395MB-BB-HA	MS-V3295MB-BB-HA	MS-V3195MB-BB-HA



※Refer to the trailing symbol for the light distribution angle. ※HA:12° HB:21° HC:25°

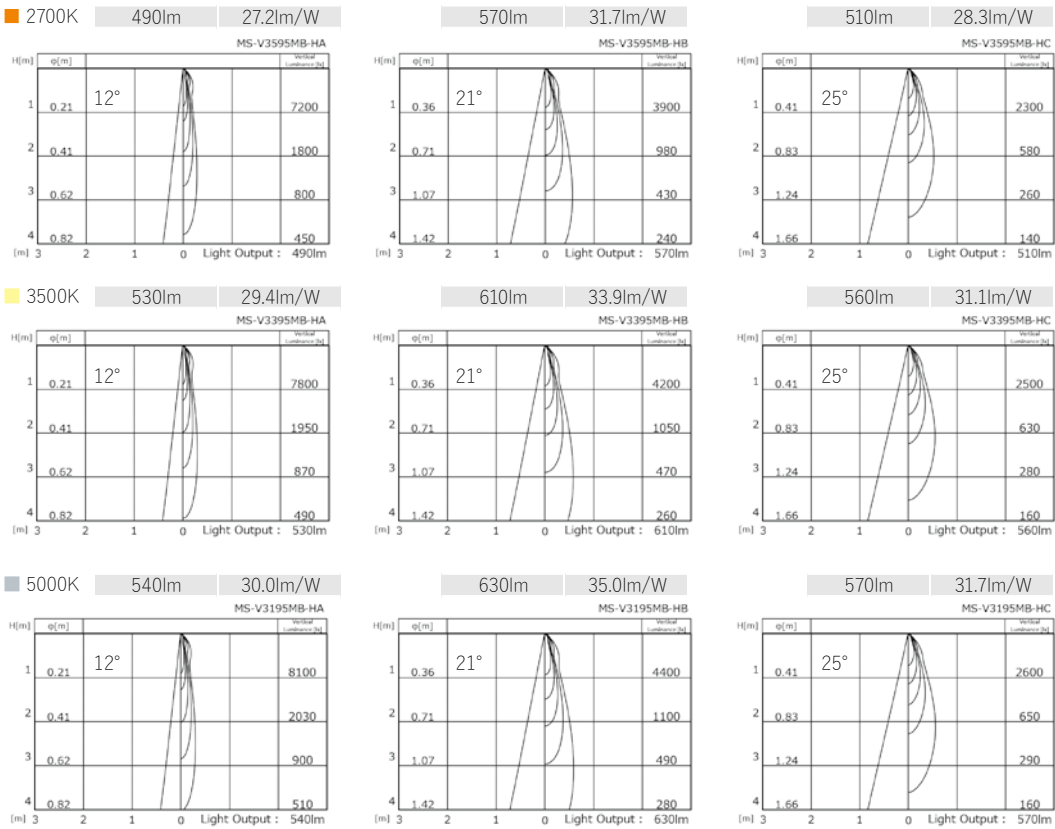

J4 series pinhole downlight


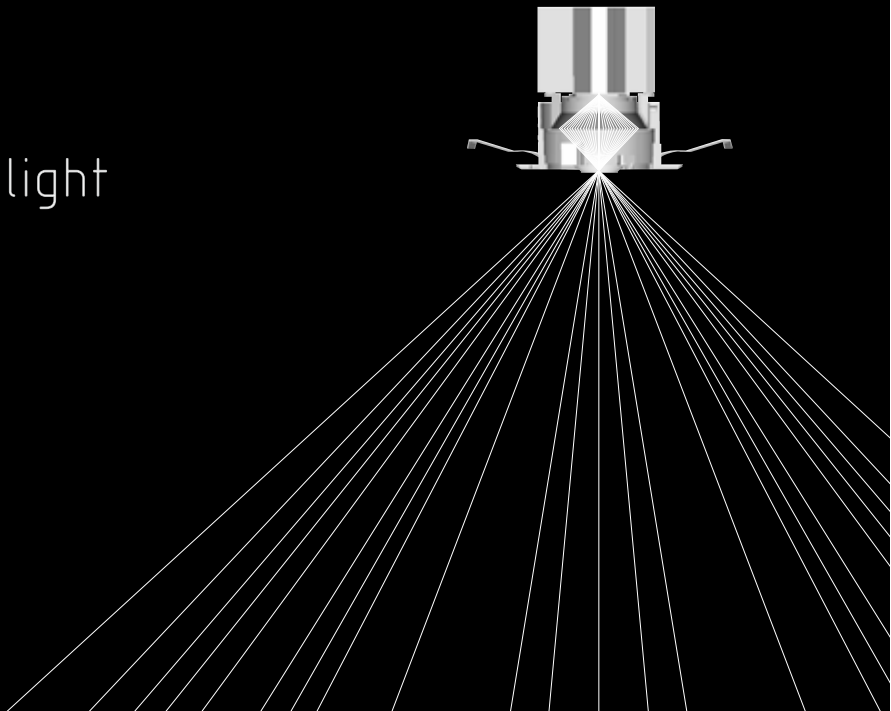


J5 series glareless downlight

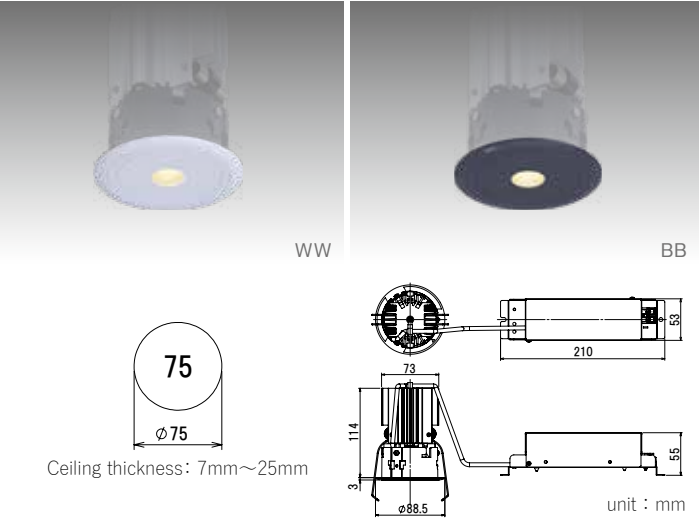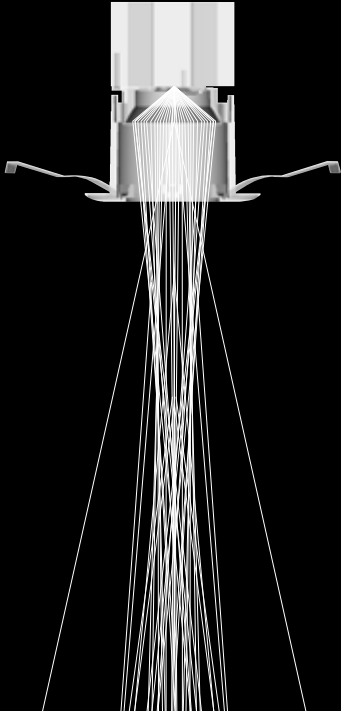

- Specification** ※Direct installation to ceiling, for indooruse only
- Input Power : 13W
 - Weight : 0.8kg
 - Input Voltage : 100V
 - Dimming Range : 1~100%
 - Light Angle : 80°
 - CCT : 2700K, 3000K, 3500K, 4000K, 5000K
 - Color Rendering : Ra93
 - Embedded Hole Diameter : ϕ 75
 - M type General Costruction



		2700K	3000K	3500K	4000K	5000K
Ra93	○ White	MS-J4593MB-WW	MS-J4493MB-WW	MS-J4393MB-WW	MS-J4293MB-WW	MS-J4193MB-WW
	● Black	MS-J4593MB-BB	MS-J4493MB-BB	MS-J4393MB-BB	MS-J4293MB-BB	MS-J4193MB-BB

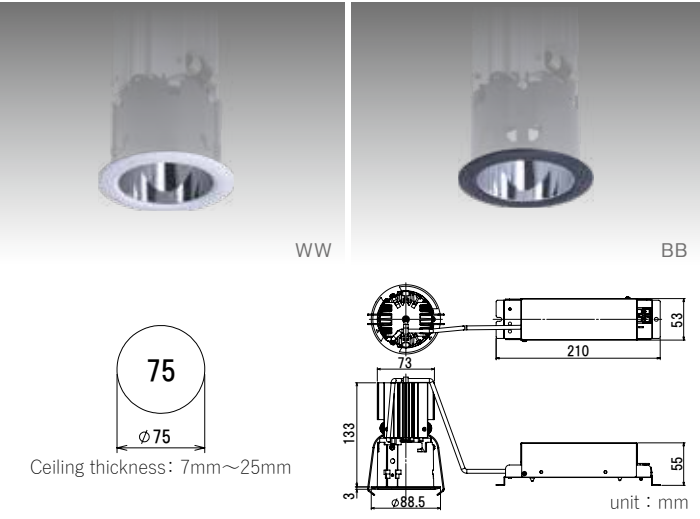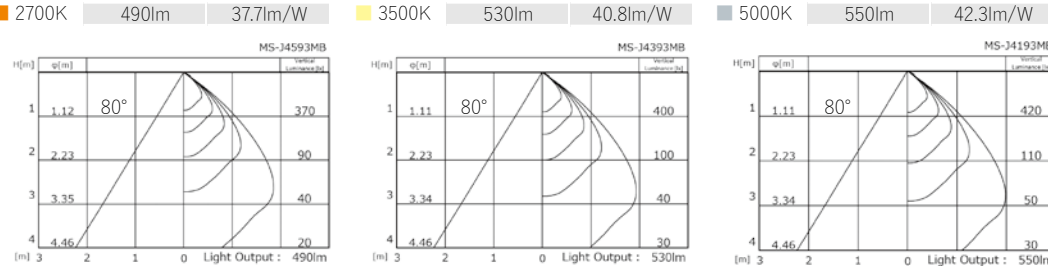

- Specification** ※Direct installation to ceiling, for indooruse only
- Input Power : 23W
 - Weight : 0.8kg
 - Input Voltage : 100V
 - Dimming Range : 1~100%
 - Light Angle : 20°, 40°
 - CCT : 2700K, 3000K, 3500K, 4000K, 5000K
 - Color Rendering : Ra93
 - Embedded Hole Diameter : ϕ 75
 - M type General Costruction

		2700K	3000K	3500K	4000K	5000K
Ra93	20° ○ White	MS-J5593MB-WW-0B	MS-J5493MB-WW-0B	MS-J5393MB-WW-0B	MS-J5293MB-WW-0B	MS-J5193MB-WW-0B
	20° ● Black	MS-J5593MB-BB-0B	MS-J5493MB-BB-0B	MS-J5393MB-BB-0B	MS-J5293MB-BB-0B	MS-J5193MB-BB-0B
	40° ○ White	MS-J5593MB-WW	MS-J5493MB-WW	MS-J5393MB-WW	MS-J5293MB-WW	MS-J5193MB-WW
	40° ● Black	MS-J5593MB-BB	MS-J5493MB-BB	MS-J5393MB-BB	MS-J5293MB-BB	MS-J5193MB-BB

※Refer to the trailing symbol for the light distribution angle. ※No end suffix for part number:40° -0B:20°

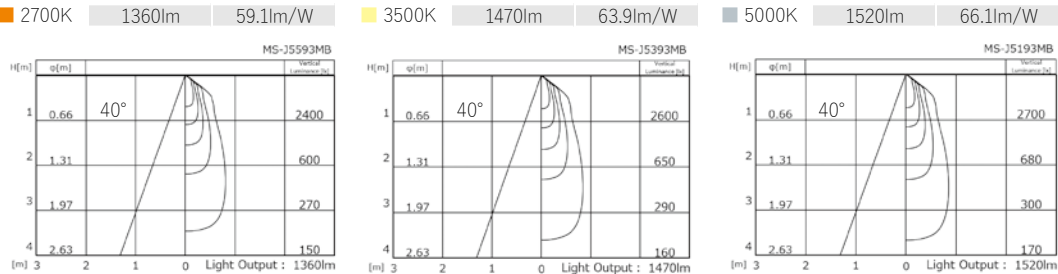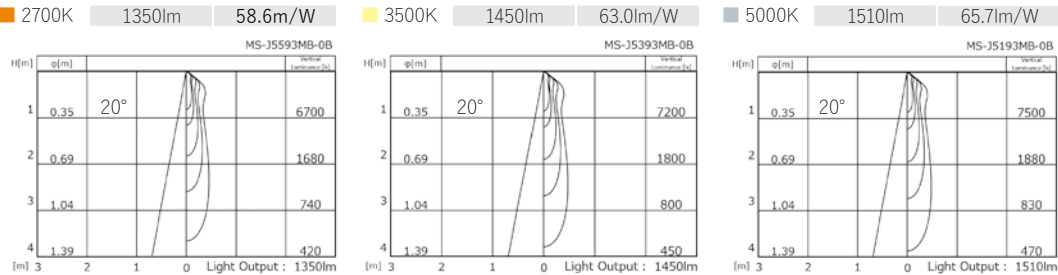

SALIOT BRIDGE BOX

SALIOT repeater that can be connected to conventional dimming systems

When using a SALIOT controlled by the Bluetooth in conjunction with a conventional luminaire, you may want to operate the dimming ON/OFF at the same time.

By using a dedicated SALIOT repeater, SALIOT dimming can be controlled simultaneously in PWM signal dimming, 0-10V dimming, and DMX signal dimming.

When introducing the dimming system or adding SALIOT to the existing dimming system, this dedicated relay can be connected and dimmed in conjunction with ordinary lighting fixtures.


When the DMX signal dimmer is used, the dedicated relay unit can adjust the light output while also adjusting the pan, tilt, color tone and light distribution angle.




0-10V	MS-V-OP0007
DMX512	MS-V-OP0010-AA
PWM	MS-V-OP0011

※The SALIOT cannot be used with the phase dimming method.
※Also, please contact your dealer to confirm the connection and operation of the dimming system and the DMX controller described above.

SALIOT BRIDGE BOX Diagram

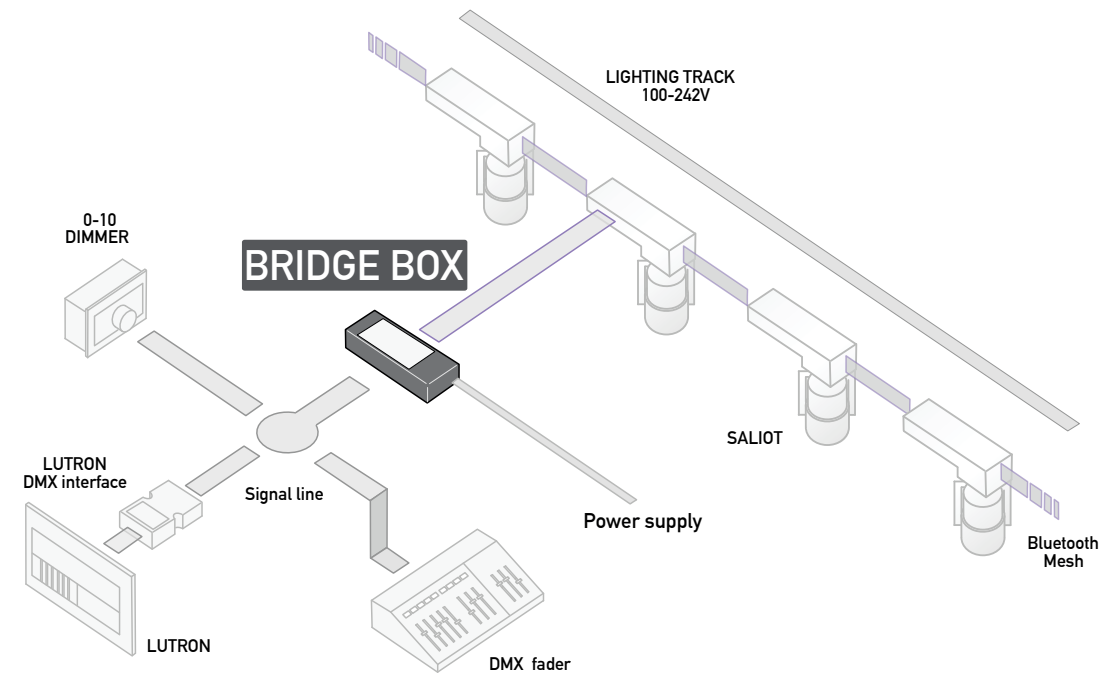


Channels for DMX Fader

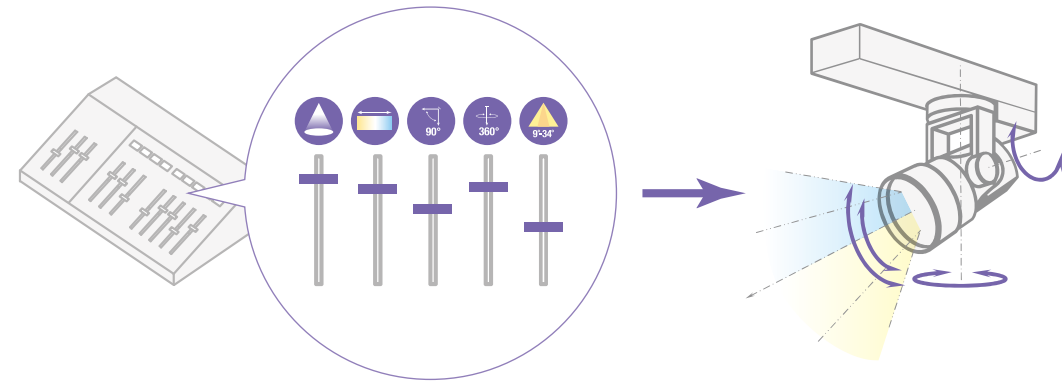

References



photo by Junya Igarashi

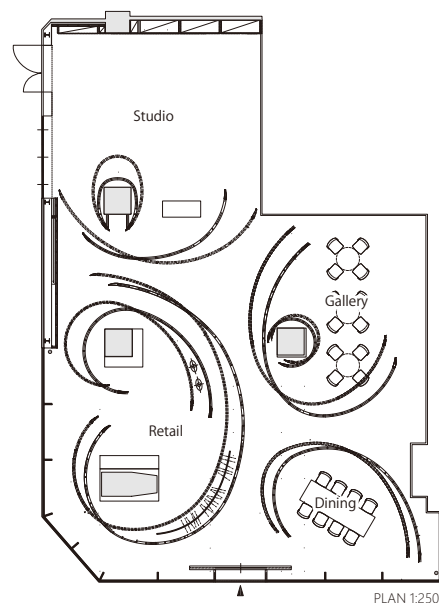

PLAN 1:250

The SALIOT gallery, which extends over a 5m ceiling height and 341 m² in total area, is composed of four areas and corridors separated by giant walls of the gold. It reproduces four scenes: gallery, studio, retail, and dining. Please experience the world of SALIOT, which is different from the past lighting fixtures.



MinebeaMitsumi Inc.
SALIOT Takanawa Gallery
 1F Nitten Mita Building, 3-12-14 Mita,
 Minato-ku, Tokyo 108-0073
 TEL: +81-3-6758-6733 10:30 am to 19:30 pm
 Closed on Saturday, Sunday and holidays.
 *Reservations required
<http://www.saliot.com/>

Website

<http://www.saliot.com/>

SALIOT updates, such as product details, installation examples, and videos, can be found in eight languages.




- Library
 - Case Study
 - Installation Ideas explained by category utilizing SALIOT
 - DIALux Plugin Catalog
 - Download of SALIOT Plugin available
 - SALIOT App
 - You can check the SALIOT application

- Introduction to SALIOT installations
- Search engine for SALIOT
- In addition to product information, various types of optical data, specifications, drawings, and instruction manuals can be downloaded from here.

News



- We will provide you with the latest information on events, new products, etc.

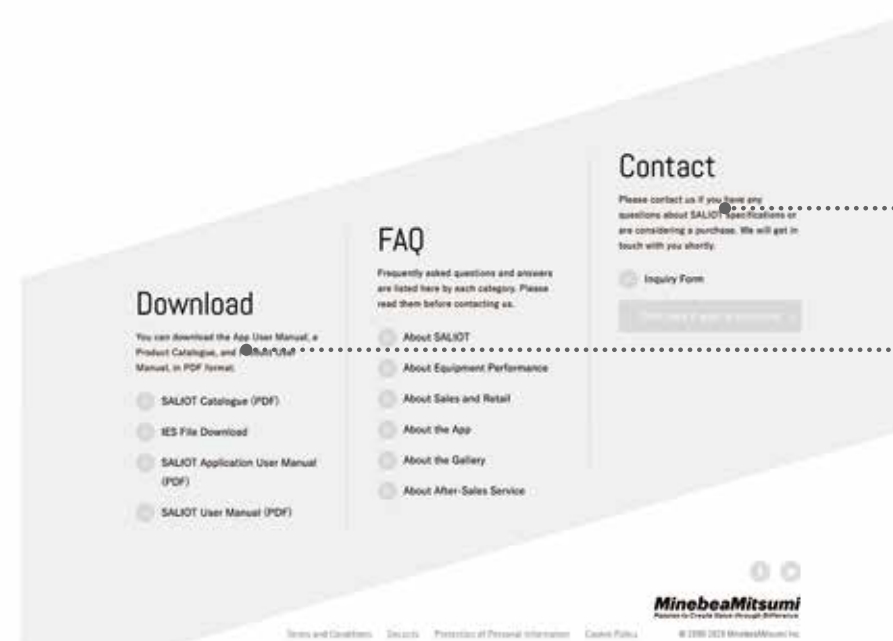

- Inquiries about the gallery tour reservation are also received from time to time.
- The product catalogs, operation app quick start guides, and SALIOT instruction manuals can also be accessed on the website.

Model Number	Page
MS- J4X93MB-XX	61
J5X93MB-XX	62
J5X93MB-XX-0B	62
V1X95MB-XX	52
V1X95MB-XX-0X	52
V1X95MB-XX-HX	55
V1A83MB-XX-HX	56
V1A83MB-XX	53
V1A83MB-XX-0X	53
V2X95MB-XX	36
V2A83MB-XX	37
V3X95MB-XX	58
V3X95MB-XX-0X	58
V3X95MB-XX-HX	59
V4X95MB-XX	48
V5X95MB-XX	44
V5A83MB-XX	45
V5X95MB-XX-WP	46
V6X93MB-XX	39
V6A83MB-XX	41

Model Number	Page
MS- V6B70MB-XX	42
V6XXXMB-XX-G1	40
V7X93MB-XX	50
V-OP0001	36
V-OP0002	36
V-OP0003	42
V-OP0007	63
V-OP0009	42
V-OP0010-AA	63
V-OP0011	63
V-OP0012	36
V-OP0013	36
V-OP0014	48
V-OP0015	48
V-OP0016	48
V-OP0017	48
V-OP0021	39
V-OP0022	39
V-OP0025	39
V-OP0026	39



MinebeaMitsumi
Passion to Create Value through Difference

Contact Information
Tokyo Headquarters 3-9-6 Mita, Minato-ku, Tokyo 108-8330 Phone: +81-3-6758-6711 Fax: +81-3-6758-6700

Sales Divisions
NMB Technologies Corporation, U.S.A Phone: +1-248-919-2250 Fax: +1-248-919-2302
NMB-Minebea-GmbH, Europe Phone: +49-6103-913-226 Fax: +49-6103-913-220
NMB-Minebea Thai Ltd. Bangkok Office, Thailand Phone: +66-2-253-4897 Fax: +66-2-255-2875
NMB Singapore Ltd. Chai Chee Sales Office, Singapore Phone: +65-6278-8522 Fax: +65-6278-8477
Minebea (HongKong) Ltd. Phone: +852-3423-2300 Fax: +852-2735-4535
Minebea Trading (Shanghai) Ltd. Phone: +86-21-5405-0707 Fax: +86-21-5404-7007
Minebea (Shenzhen) Ltd. Phone: +86-755-8266-8846 Fax: +86-755-8266-8843
SALIOT Takanawa Gallery, Japan Phone: +81-3-6758-6733 Fax: +81-3-6758-6741
Tokyo Office Phone: +81-3-6758-6748 Fax: +81-3-6758-6760
Nagoya Office Phone: +81-52-231-1181 Fax: +81-52-231-1157
Osaka Office Phone: +81-6-6263-8331 Fax: +81-6-6263- 7388
<http://www.saliot.com/en/> Copyright MinebeaMitsumi Inc.